



藤蔓系列

三谷照明藤蔓系列组合照明系统



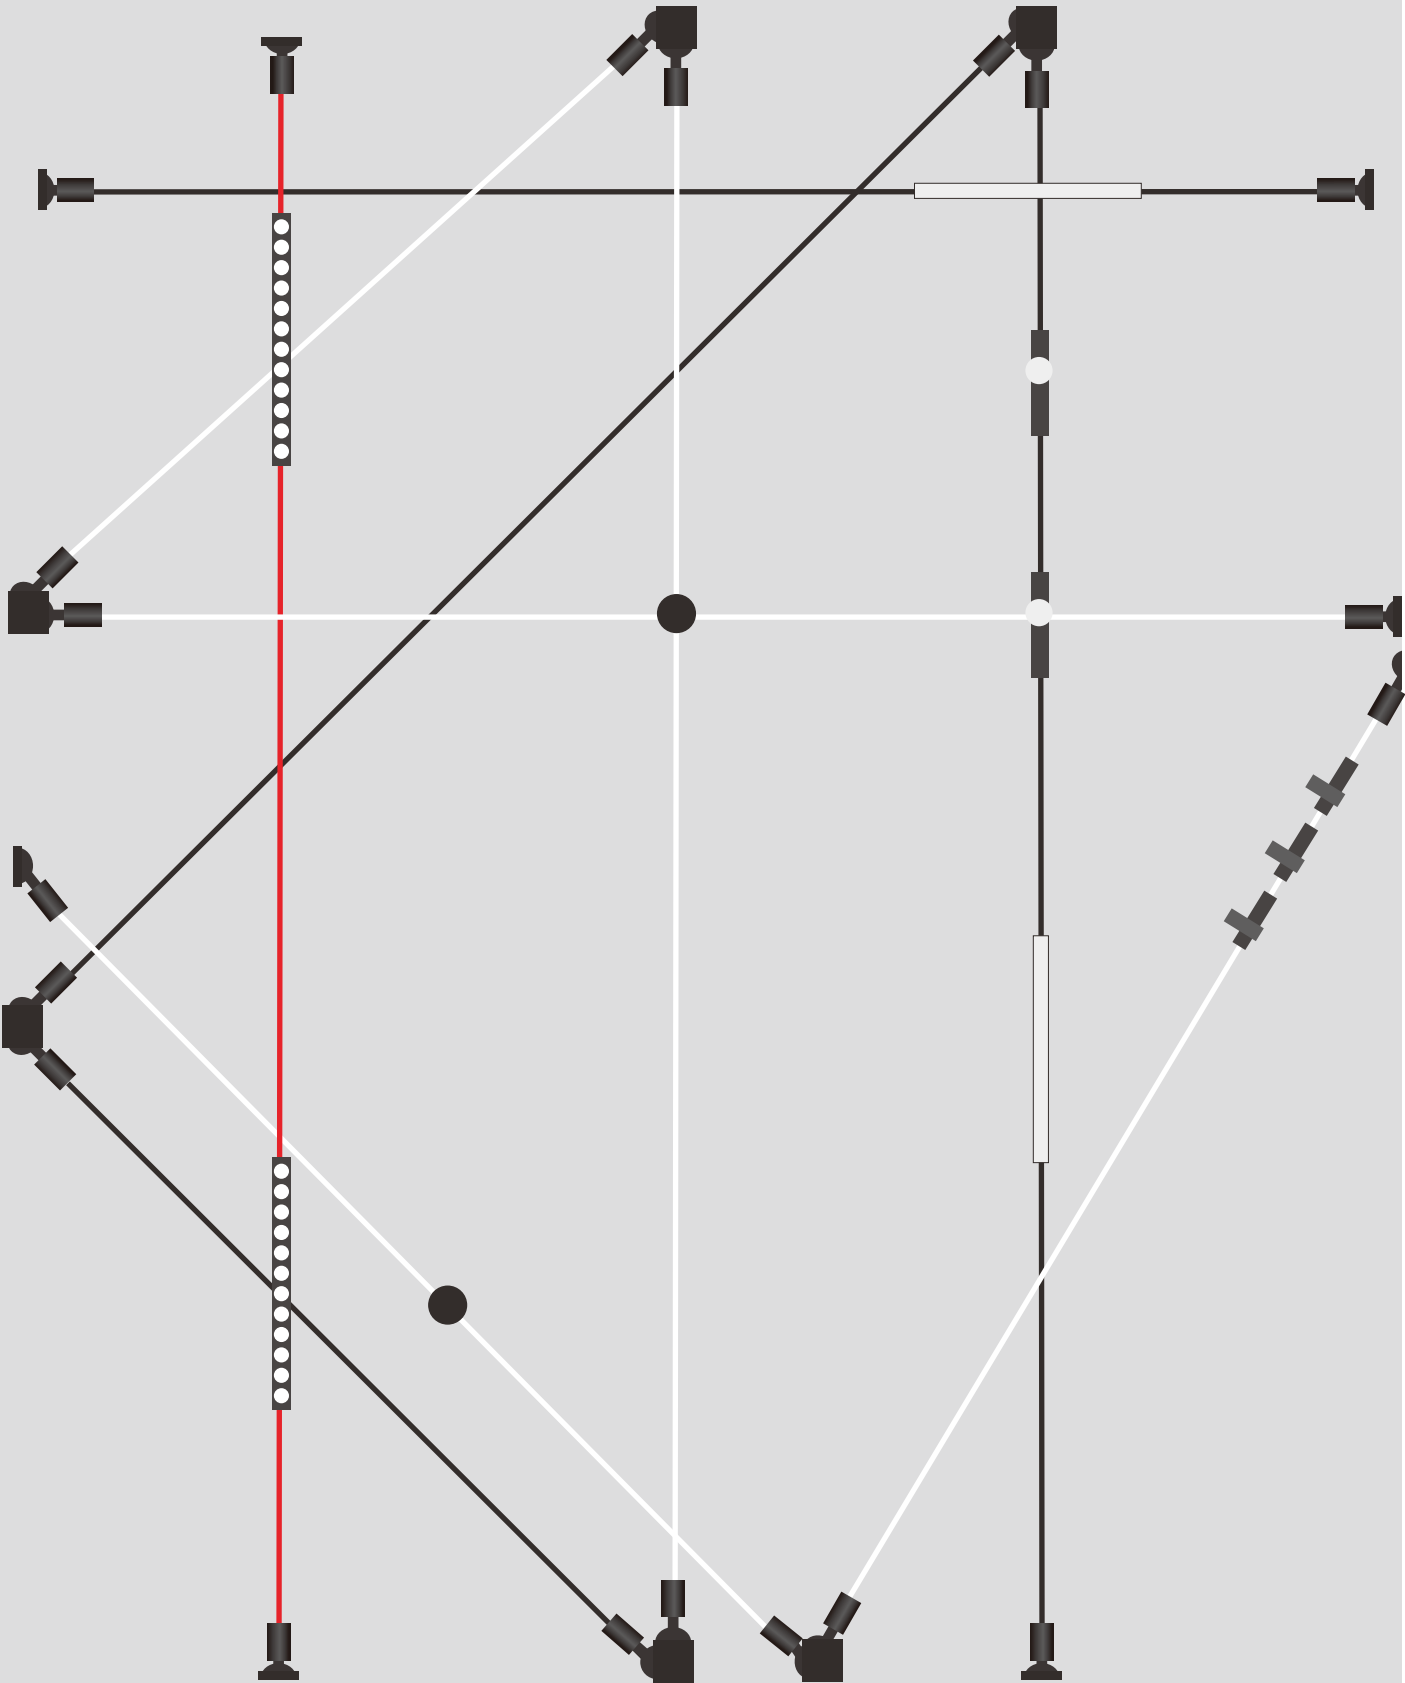

藤蔓系列轨道

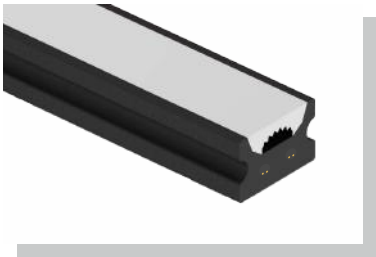

SG-GD1811D/L1000/T

藤蔓系列组合灯具

射灯



SG-SD2265T/3W



SG-SD3463T/5W



SG-SD34100T/8W

格栅线性灯



SG-GSD3660T/L284/7W

平面线性灯




SG-PMD3660T/L313/8W

柔性轨道

Flexible Track

藤蔓系列是三谷研发团队最新之作, 将轨道与柔性发光体融合起来, 并且在工艺上进一步提升, 给大家带来更加自由的灯光体验.....外观颜色有红色、白色和黑色可供选择, 为不同的空间环境提供灵活且细致的照明需求。

Flexible track is the latest work of Mitani R & D team, which integrates track and flexible luminous body, and further improves the technology, bringing you a more free lighting experience. With four tracks of different sizes and available in red, white and black, the Barney series provides flexible and detailed lighting needs for different space environments.

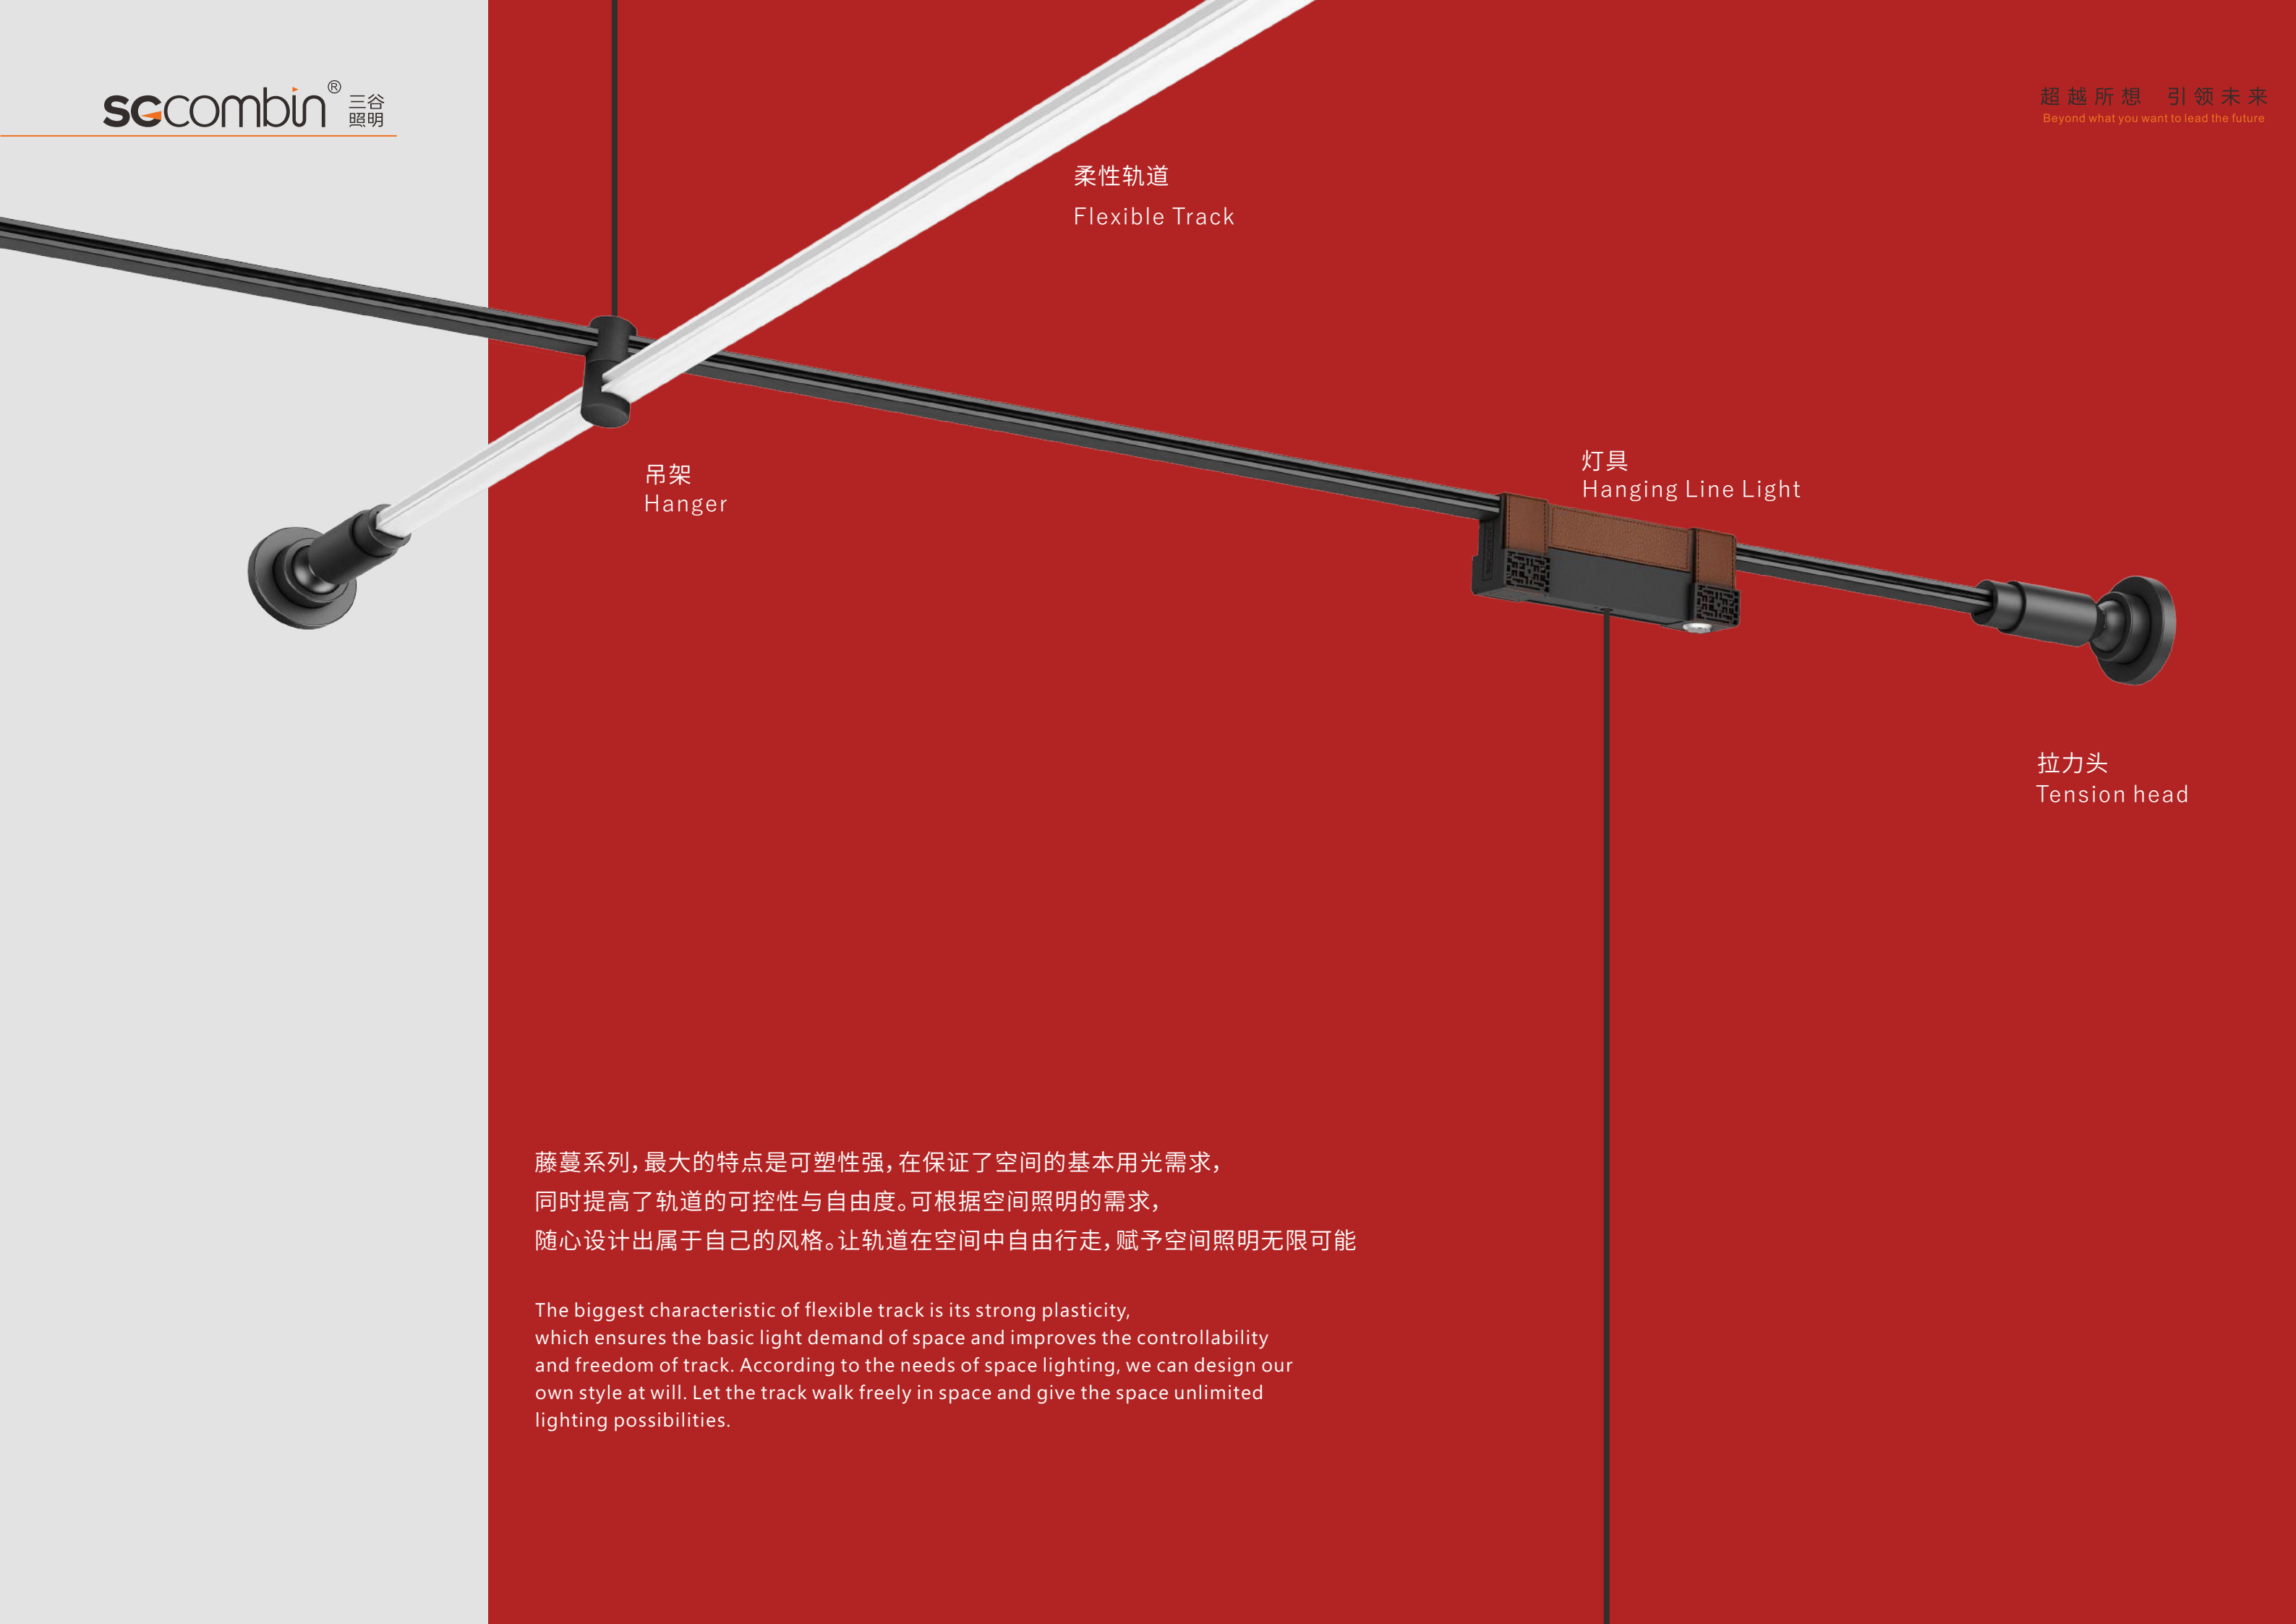

柔性轨道
Flexible Track


吊架
Hanger

灯具
Hanging Line Light

拉力头
Tension head

藤蔓系列，最大的特点是可塑性强，在保证空间的基本用光需求，同时提高了轨道的可控性与自由度。可根据空间照明的需求，随心设计出属于自己的风格。让轨道在空间中自由行走，赋予空间照明无限可能

The biggest characteristic of flexible track is its strong plasticity, which ensures the basic light demand of space and improves the controllability and freedom of track. According to the needs of space lighting, we can design our own style at will. Let the track walk freely in space and give the space unlimited lighting possibilities.

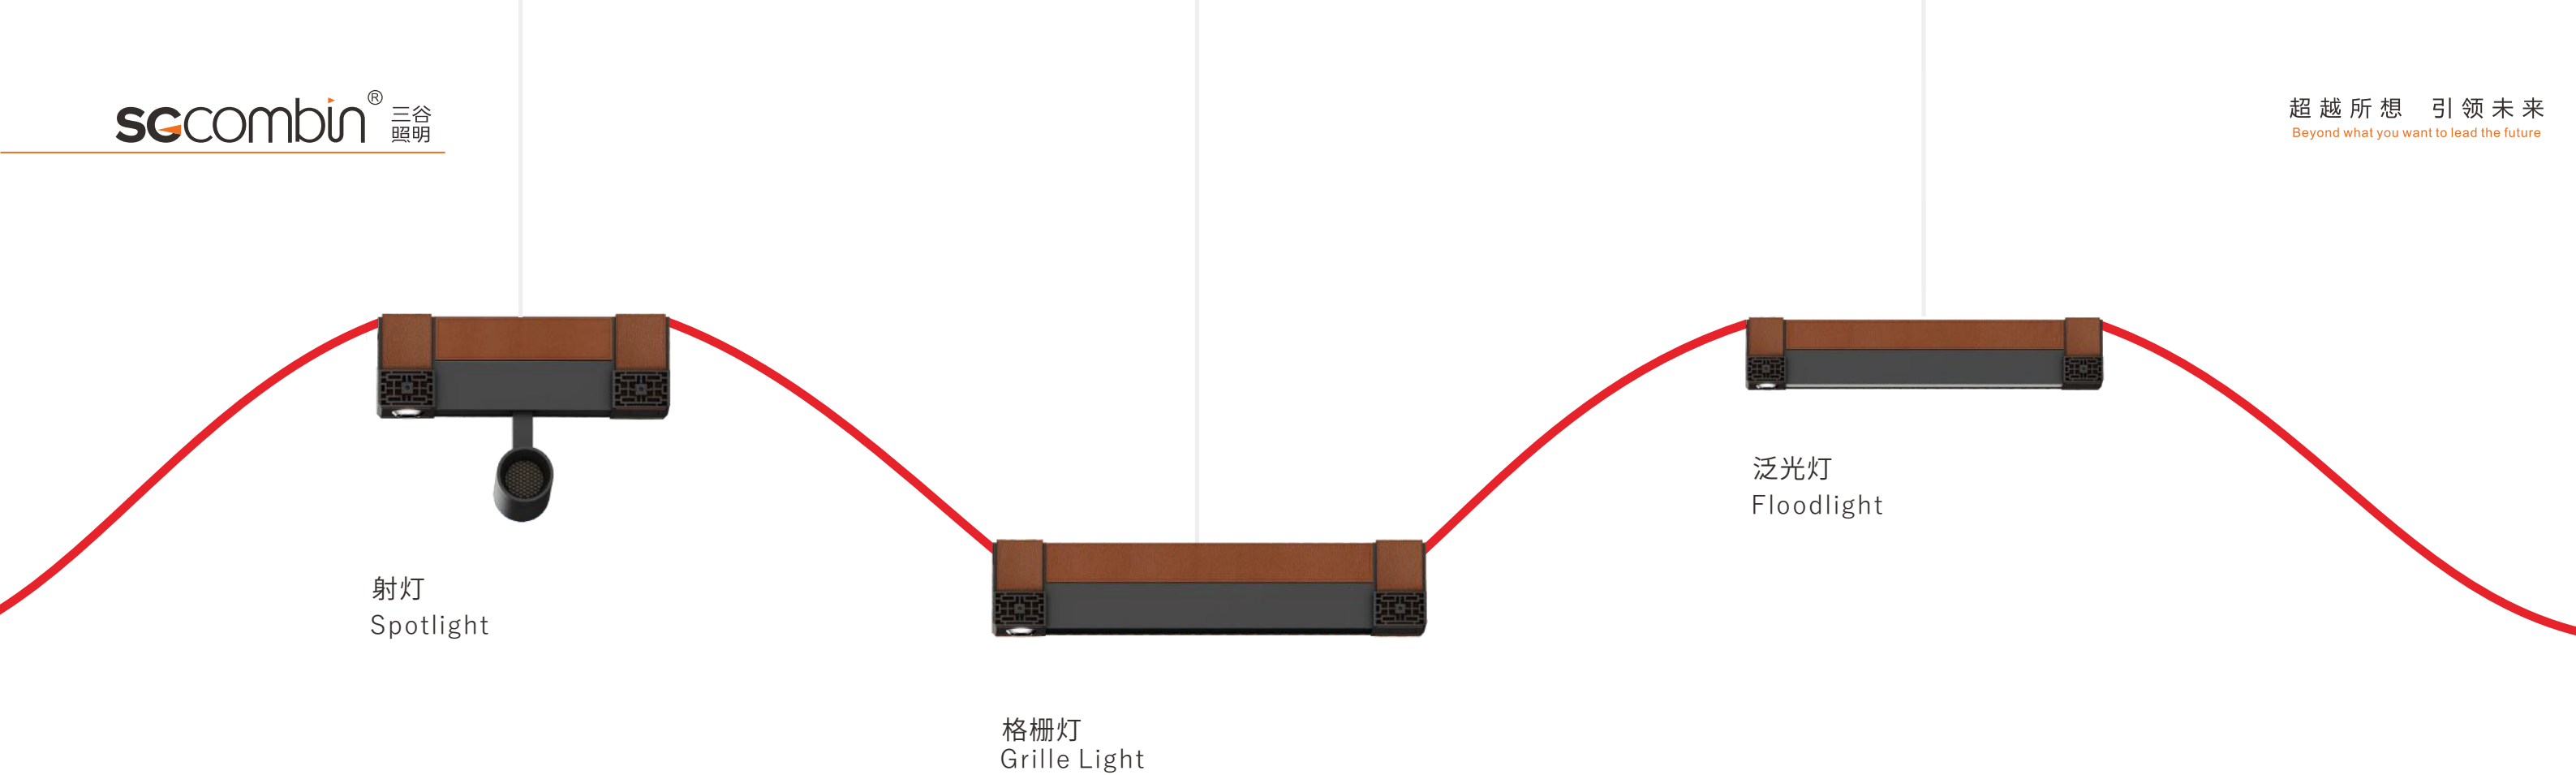


DC24V安全电压


DC24V safety rail

藤蔓系列灯具模组安装非常简易便捷;采用24V安全电压,通电后也可触摸,采取接触面导电插针皮带锁紧灯具,保证灯具工作的稳定性,提高使用寿命,同时保障了灯具安装、拆卸、维护过程的安全性。

The installation of Bani series lamp module is very simple and convenient; The safety voltage of 24V is adopted, which can be touched after being electrified, and the mechanical buckle type and belt button type double fixation are adopted, so that the working stability of the lamp is ensured, the service life is prolonged, and the safety of the lamp in the process of installation, disassembly and maintenance is guaranteed.

Multi-angle connection lighting direction free
rotation angle adjustment free installation

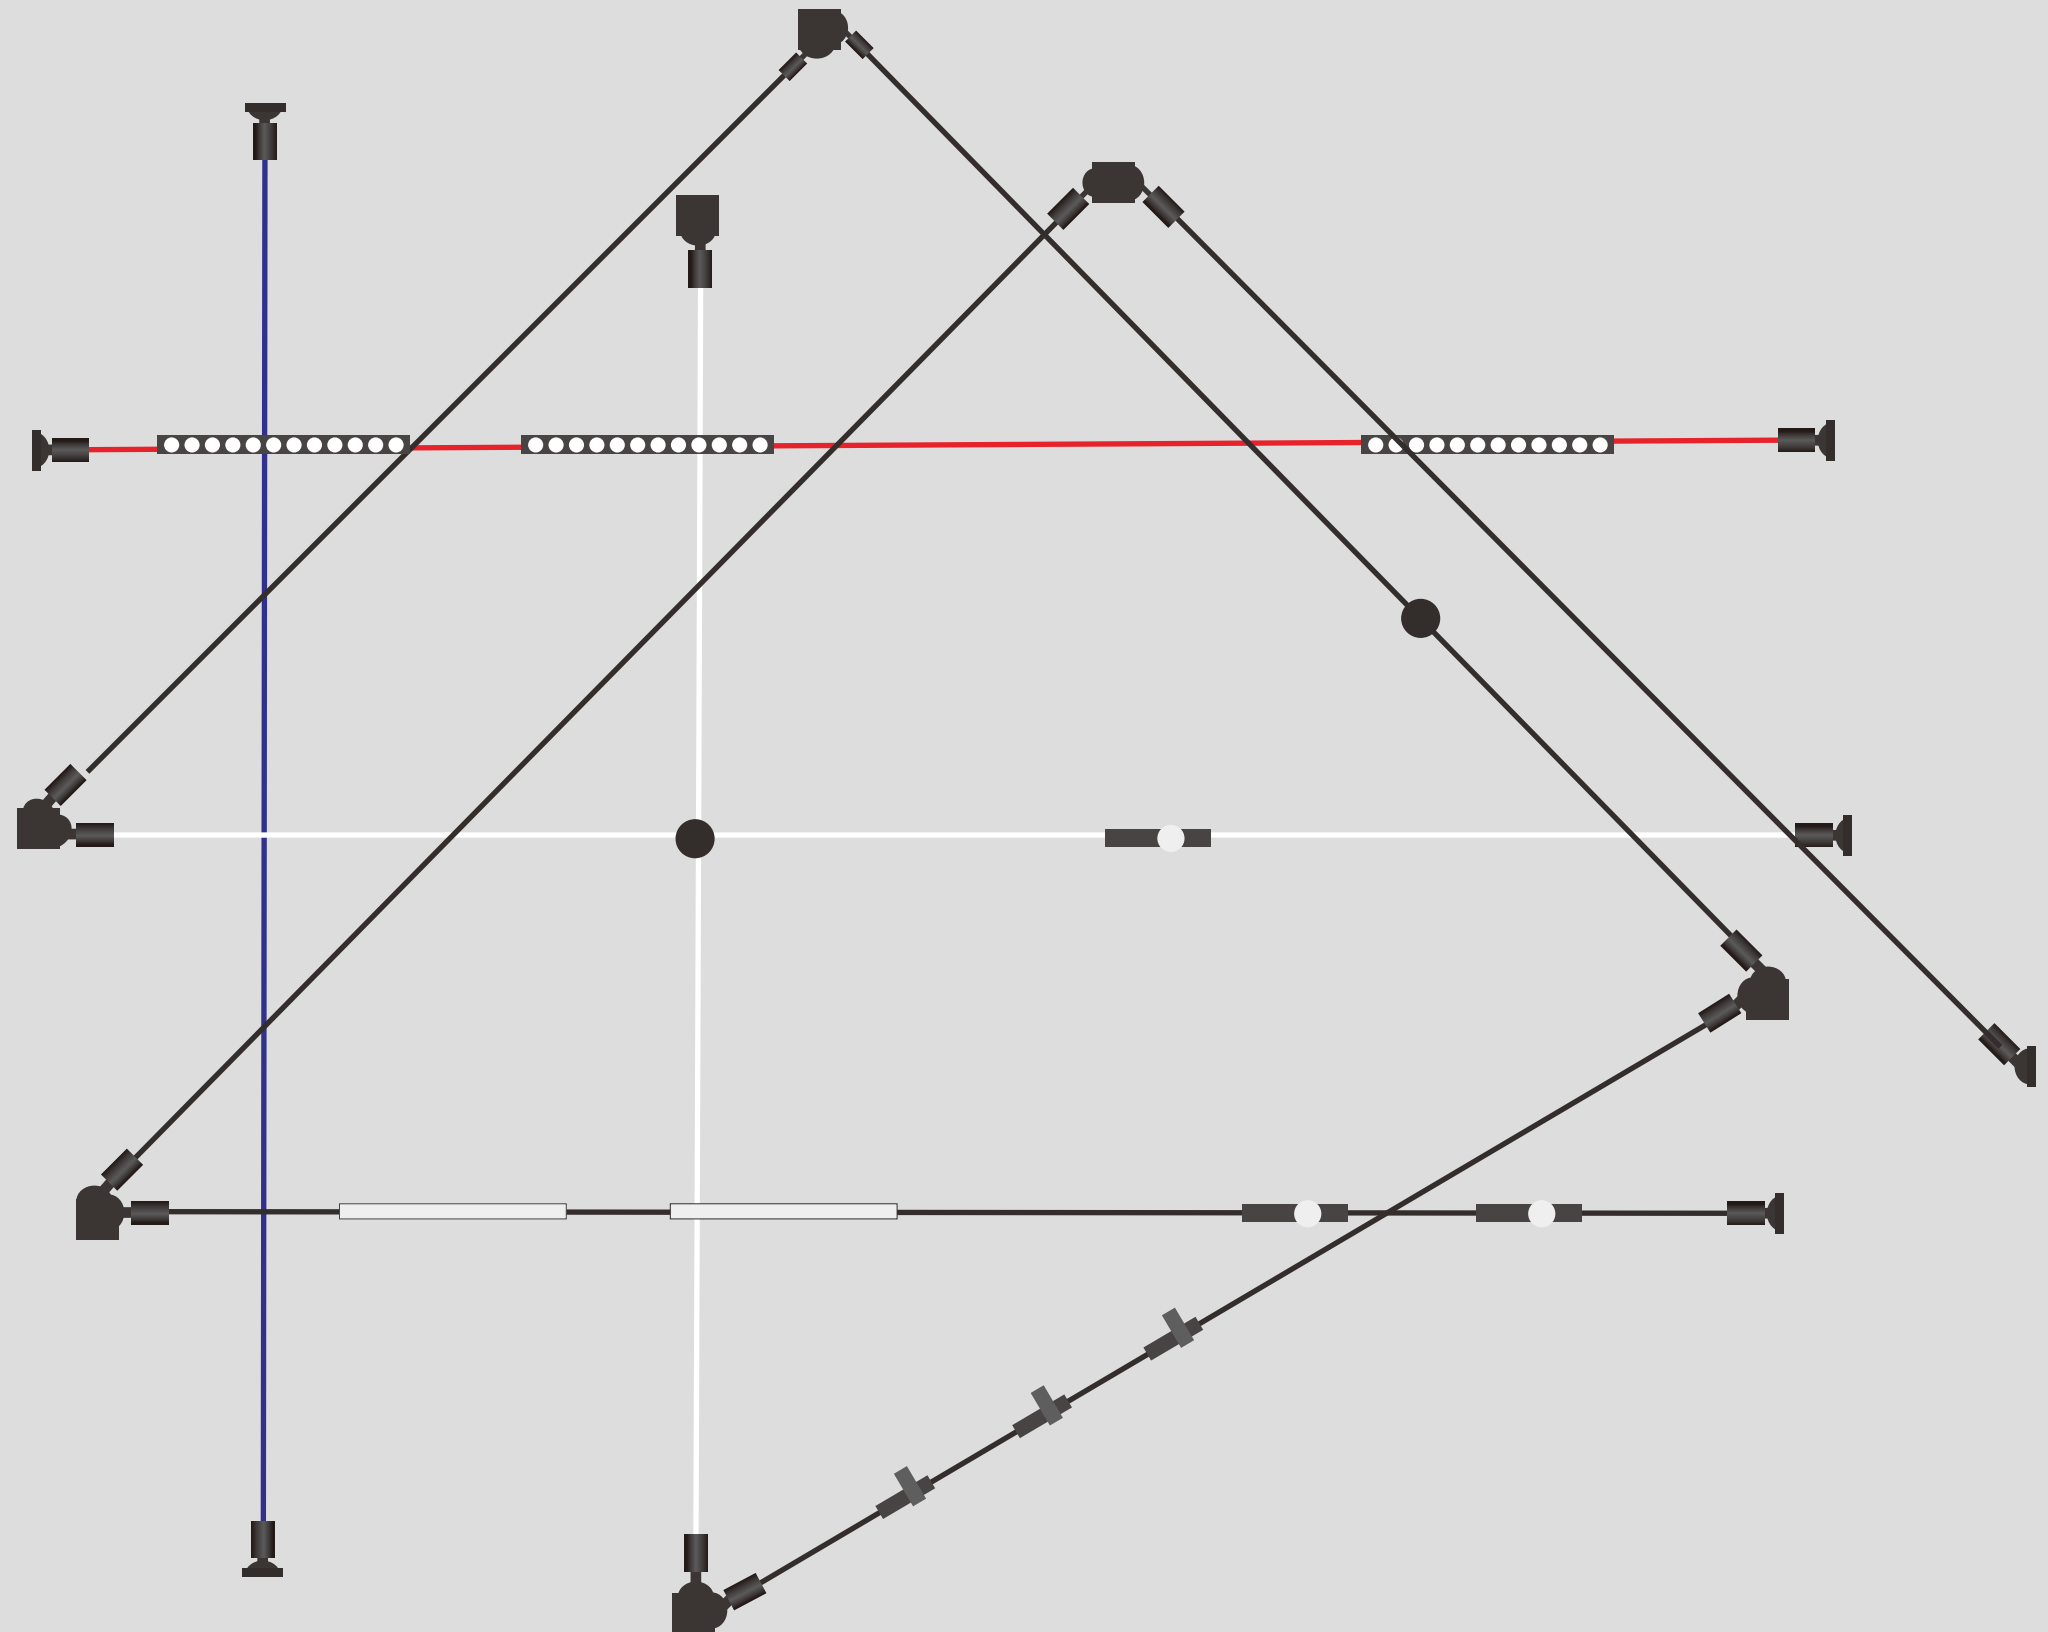

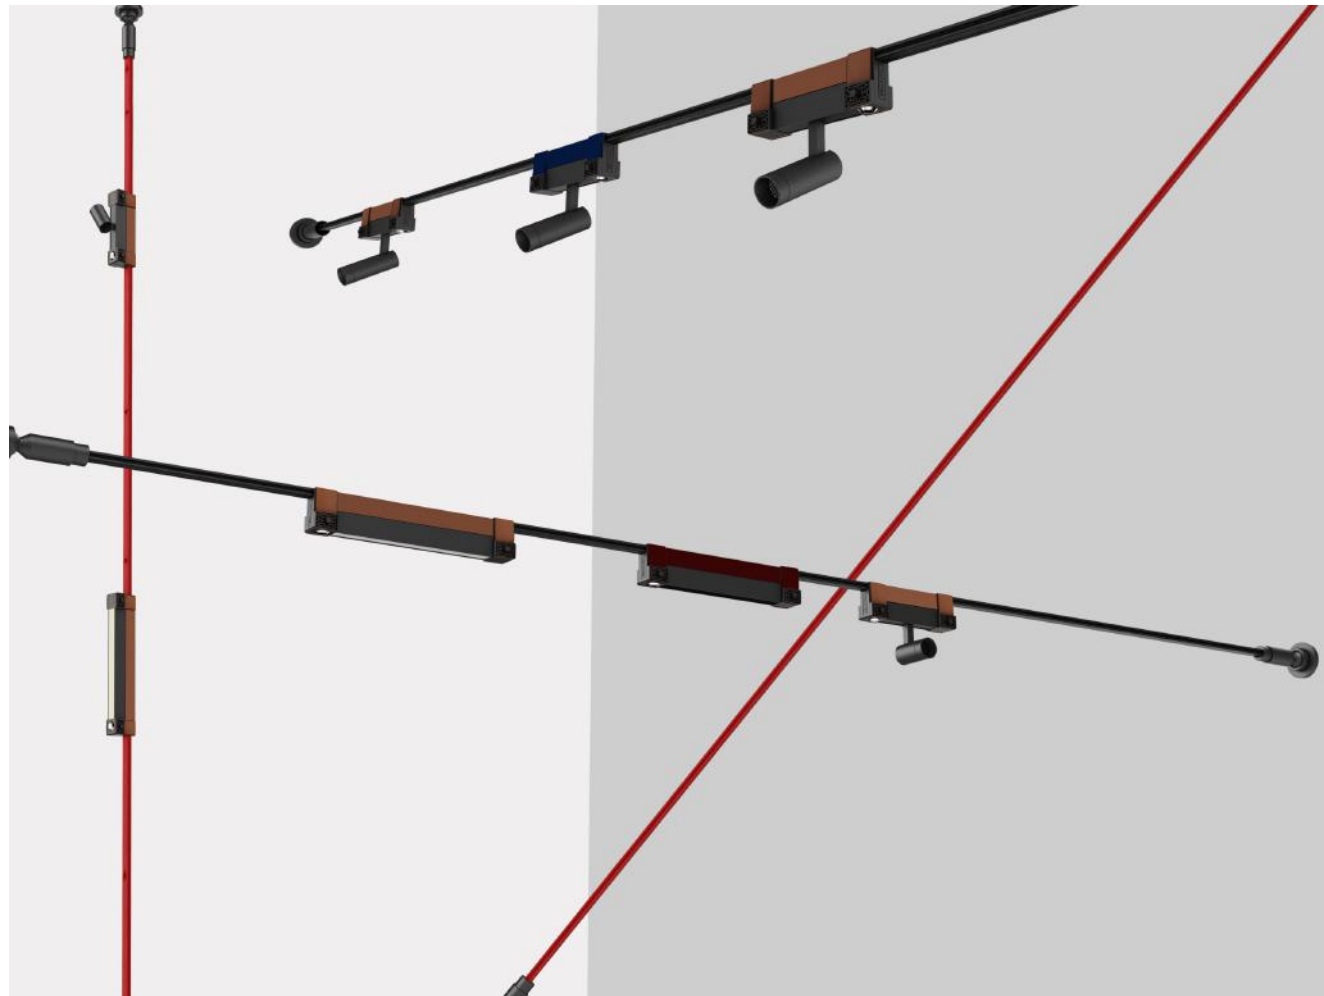

01 空间光影


从墙壁到天花只留下光线;可上下70°调节底座安装便捷
适用于异型、穹顶等多样化空间。兼具功能性及艺术性照明,
重新塑造空间光影,为室内空间及照明设计带来更多可能。

Leaving only light from the walls to the ceiling; The base can be adjusted up and down by 70 degrees, and is convenient to install, and is suitable for diversified spaces such as special-shaped spaces, domes and the like. It has both functional and artistic lighting, reshaping space light and shadow, and bringing more possibilities for interior space and lighting design.

02 灵活变化

藤蔓系列把吊顶和墙面联系起来,具有强烈的导向性,
也可以随意增加灯光,有新鲜感和设计感,堪称为模块化设计,
传统磁吸灯有的,藤蔓系列都可以满足。包括磁吸筒灯、射灯、
栅格灯、泛光条、吊灯线灯。安装简单,可以随意自行搭配。

Barney series links the ceiling and wall, has a strong orientation, can also increase lighting at will, has a sense of freshness and design, can be called modular design, traditional magnetic attraction lamp, Barney series can meet. Comprises a magnetic suction tube lamp, a spotlight, a grid lamp, a floodlight strip and a pendant lamp line lamp. Installation is simple, you can match at will.

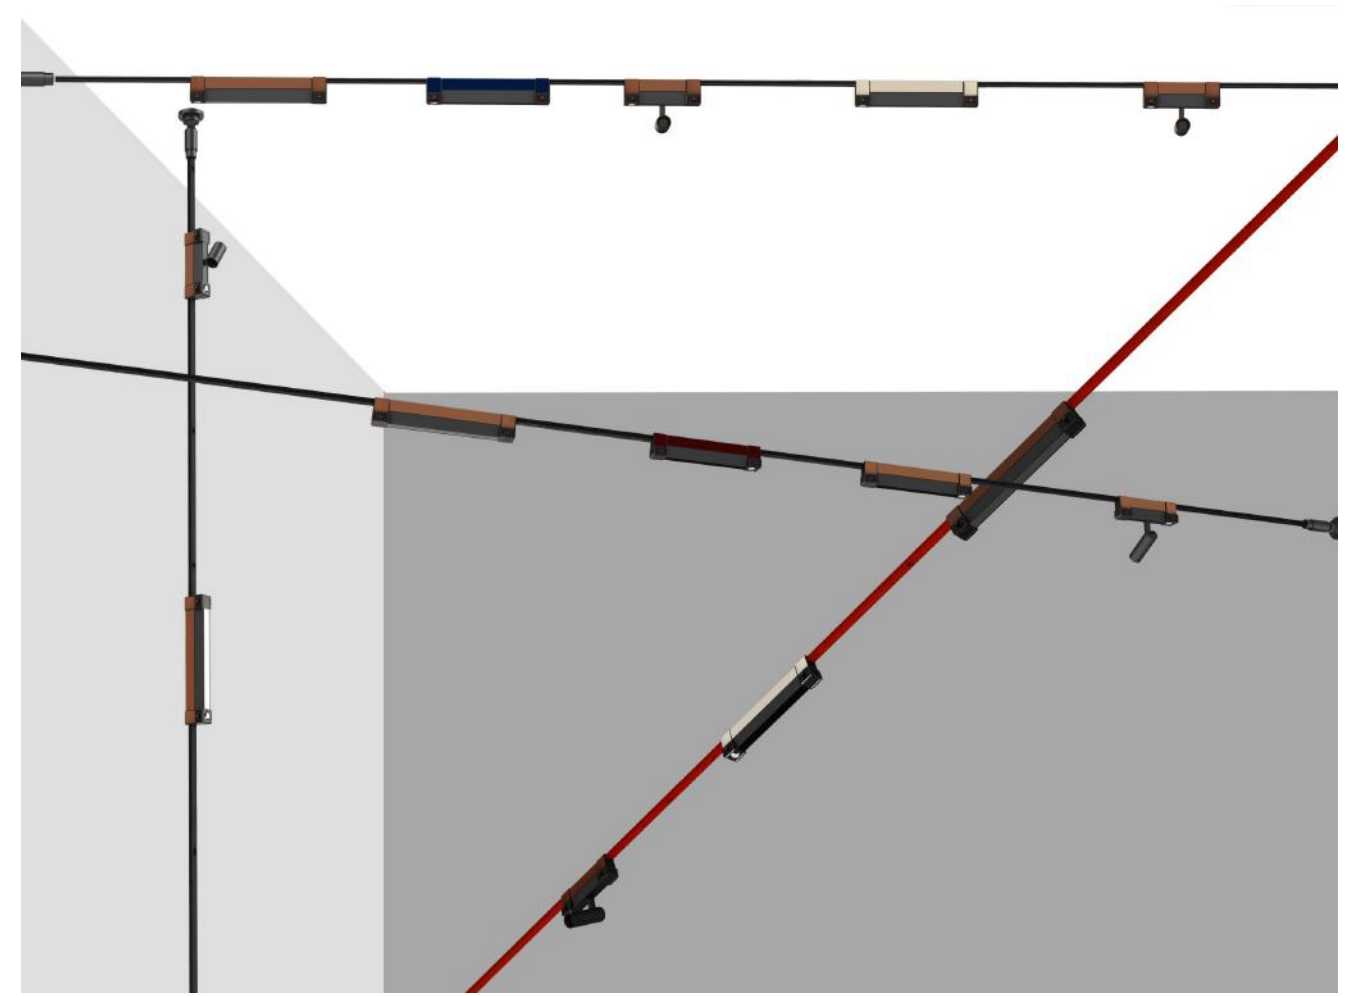

03 安装方便


藤蔓系列摒弃了多余浮夸的造型,重新解构灯的形态,
通过拉伸或定向裁剪的方式在空间中延展,突破束缚,
灵活运用,它可以根据场地尺寸任意剪裁自定义尺寸。
多角度连接,照明方向自由旋转调节,角度自由,安装随心。

Barney series abandoned the superfluous and exaggerated shape, re-deconstructed the shape of the lamp, flexible use, it can be arbitrarily cut according to the size of the venue custom size. Multi-angle connection, free rotation and adjustment of lighting direction, free angle, and easy installation.

04 场景百搭

回归本质的魅力流线感灯光 极简的造型;
适用于:美术馆、艺术馆、会所、别墅、展厅
商业空间、办公空间、设计工作室、陈设空间

Return to the essence of the charm of streamline lighting minimalist shape; Applicable to: art galleries, art galleries, clubs, villas, exhibition halls, commercial space, office space, design studios, furnishings spaces

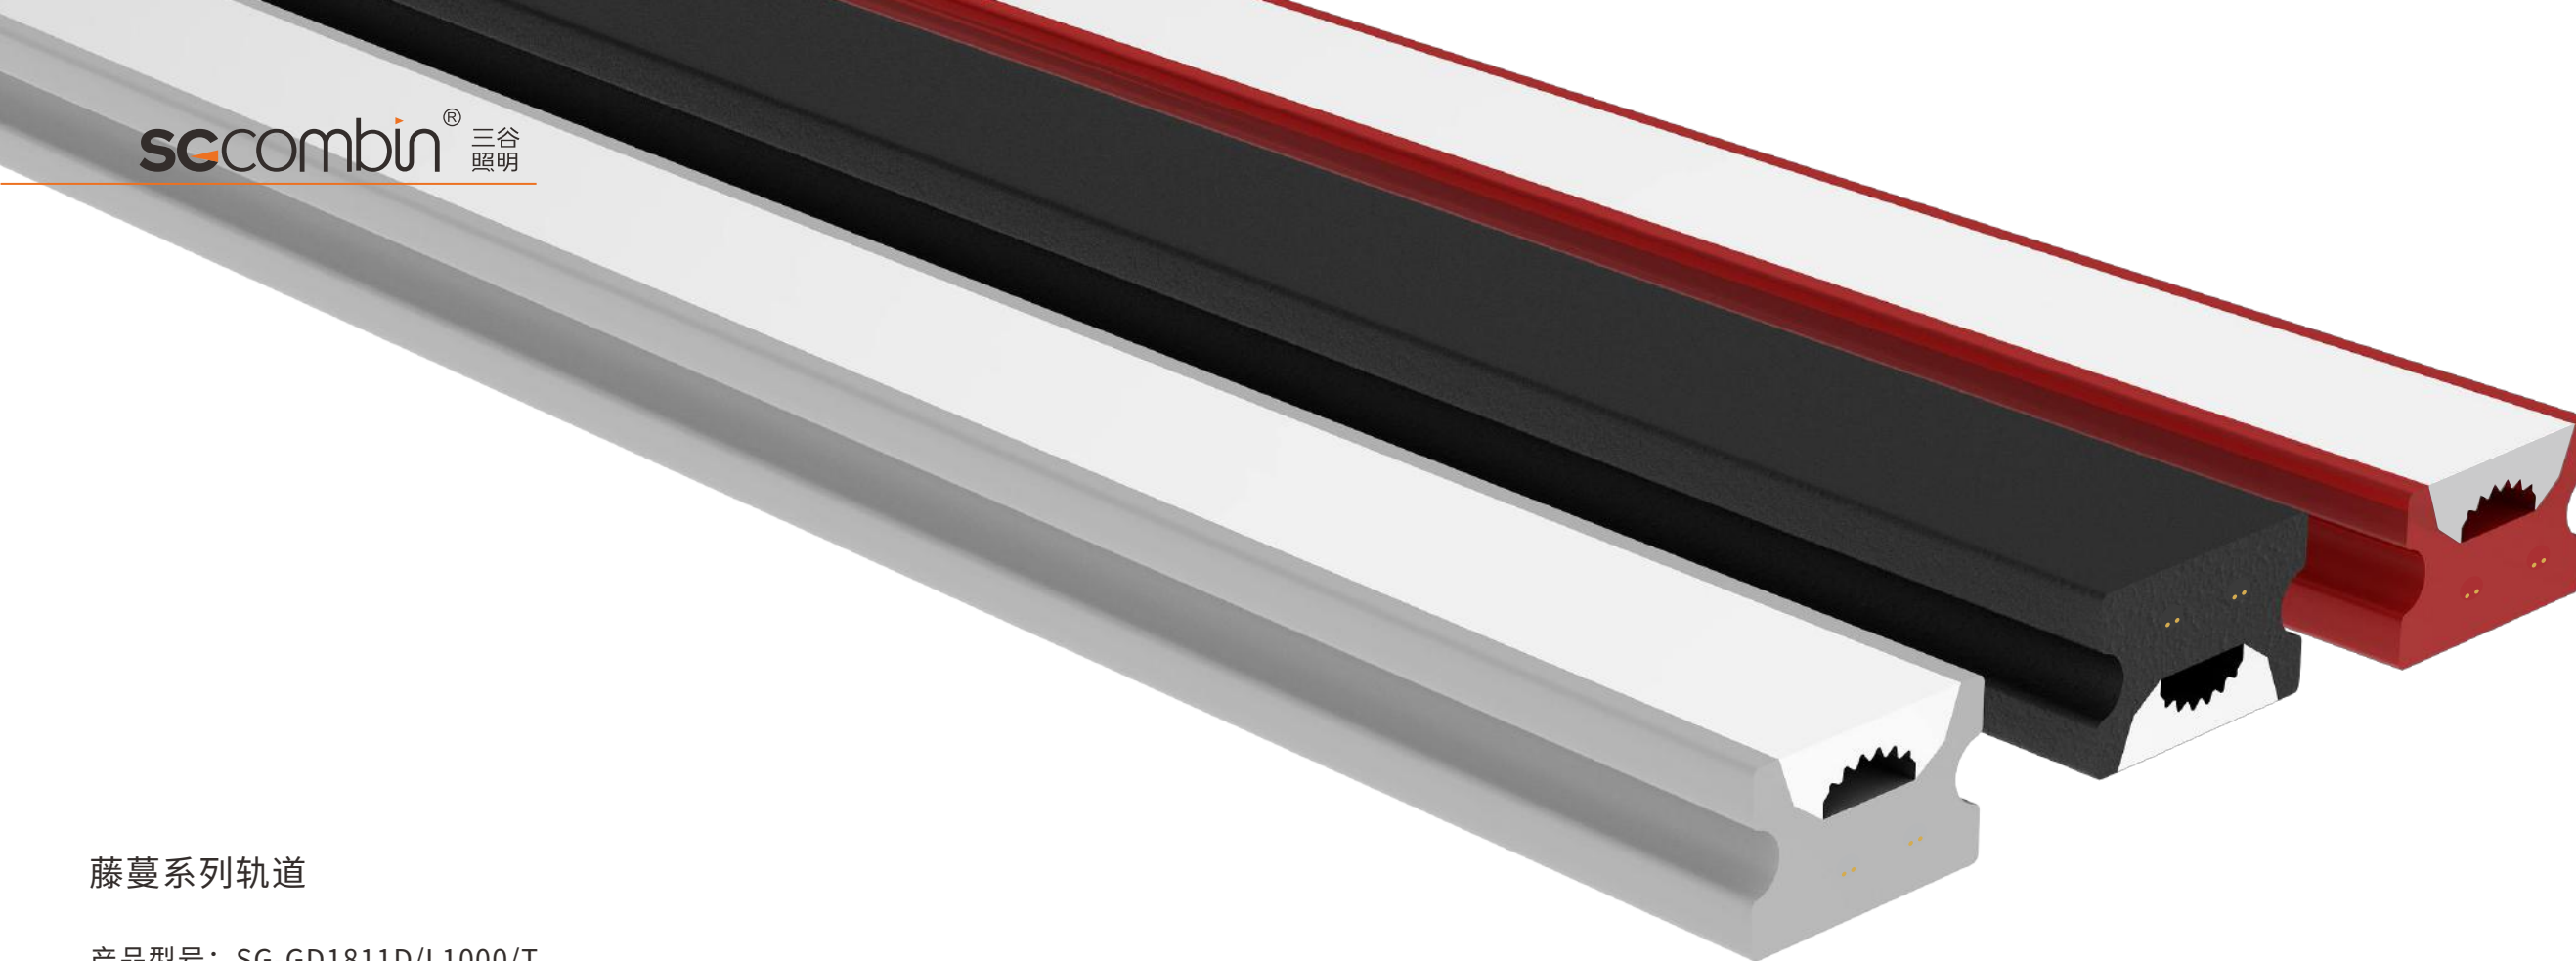

藤蔓系列轨道

产品型号：SG-GD1811D/L1000/T

安装方式：吸顶式

产品尺寸：W18*H11mm


标准规格：L1000/1500/2000mm

控制方式：多组控制

材 质：6063铝

外观颜色：黑色/白色/红色

防护等级：IP20



硅胶材质赋予了它可以扭曲的特性

1.8cm宽度使它轻灵小巧

二者的结合让设计变化万千、奇妙无穷

适用配件



单向拉力头



双向拉力头



单吊架



双吊架

适用灯具



射灯



格栅灯




平面发光线性灯




研发中...

造型变化万千

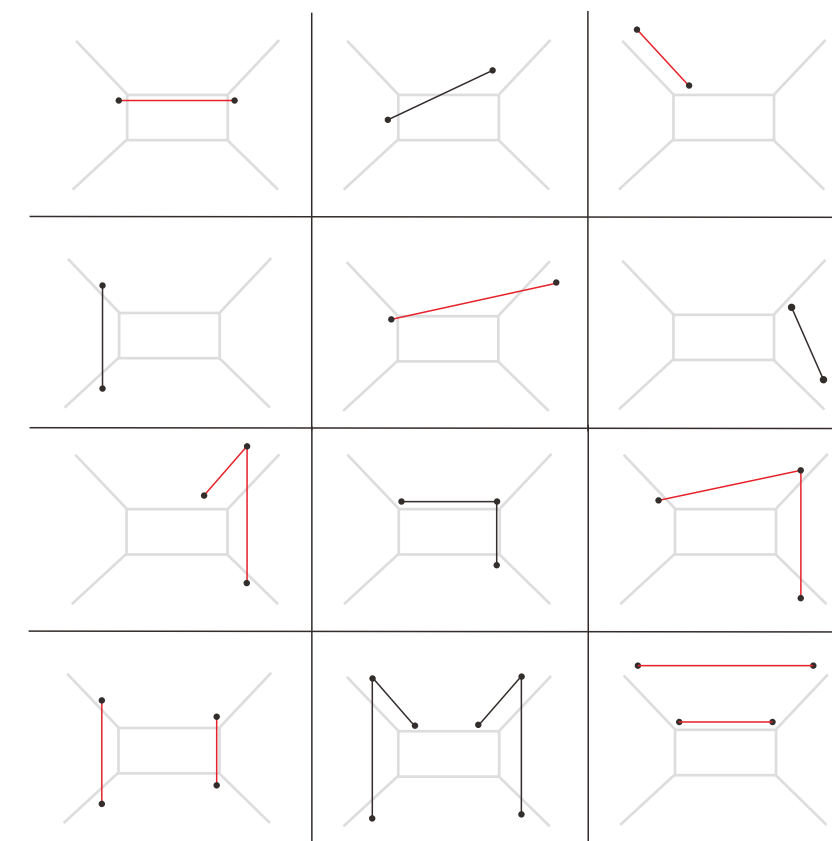



拉力头

Tension head



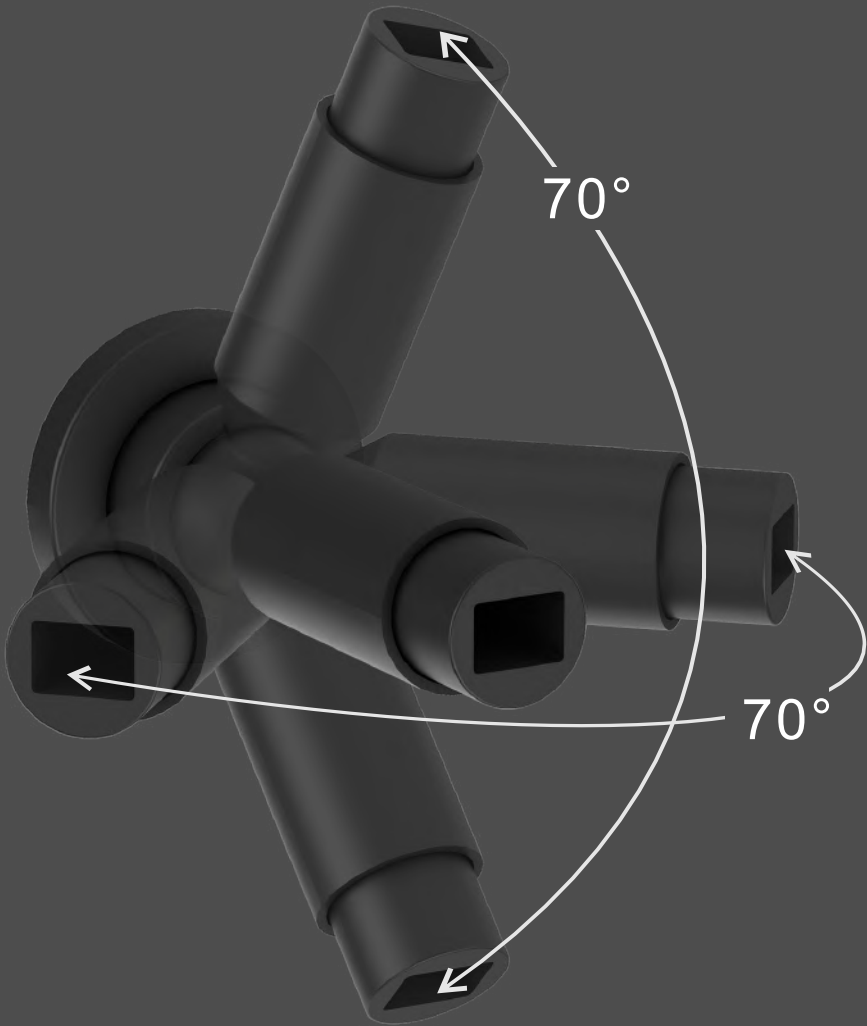


在可调角度范围内，可任意方向调角

名称	尺寸	颜色
单向拉力头	Ø67*123	黑色

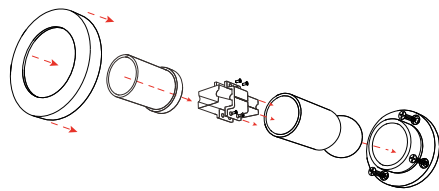

名称	尺寸	颜色
双向拉力头	60*113	黑色





吊架

Hanger

名称	尺寸	颜色
单吊架	Ø20*15	黑色



名称	尺寸	颜色
双吊架	Ø20*30	黑色

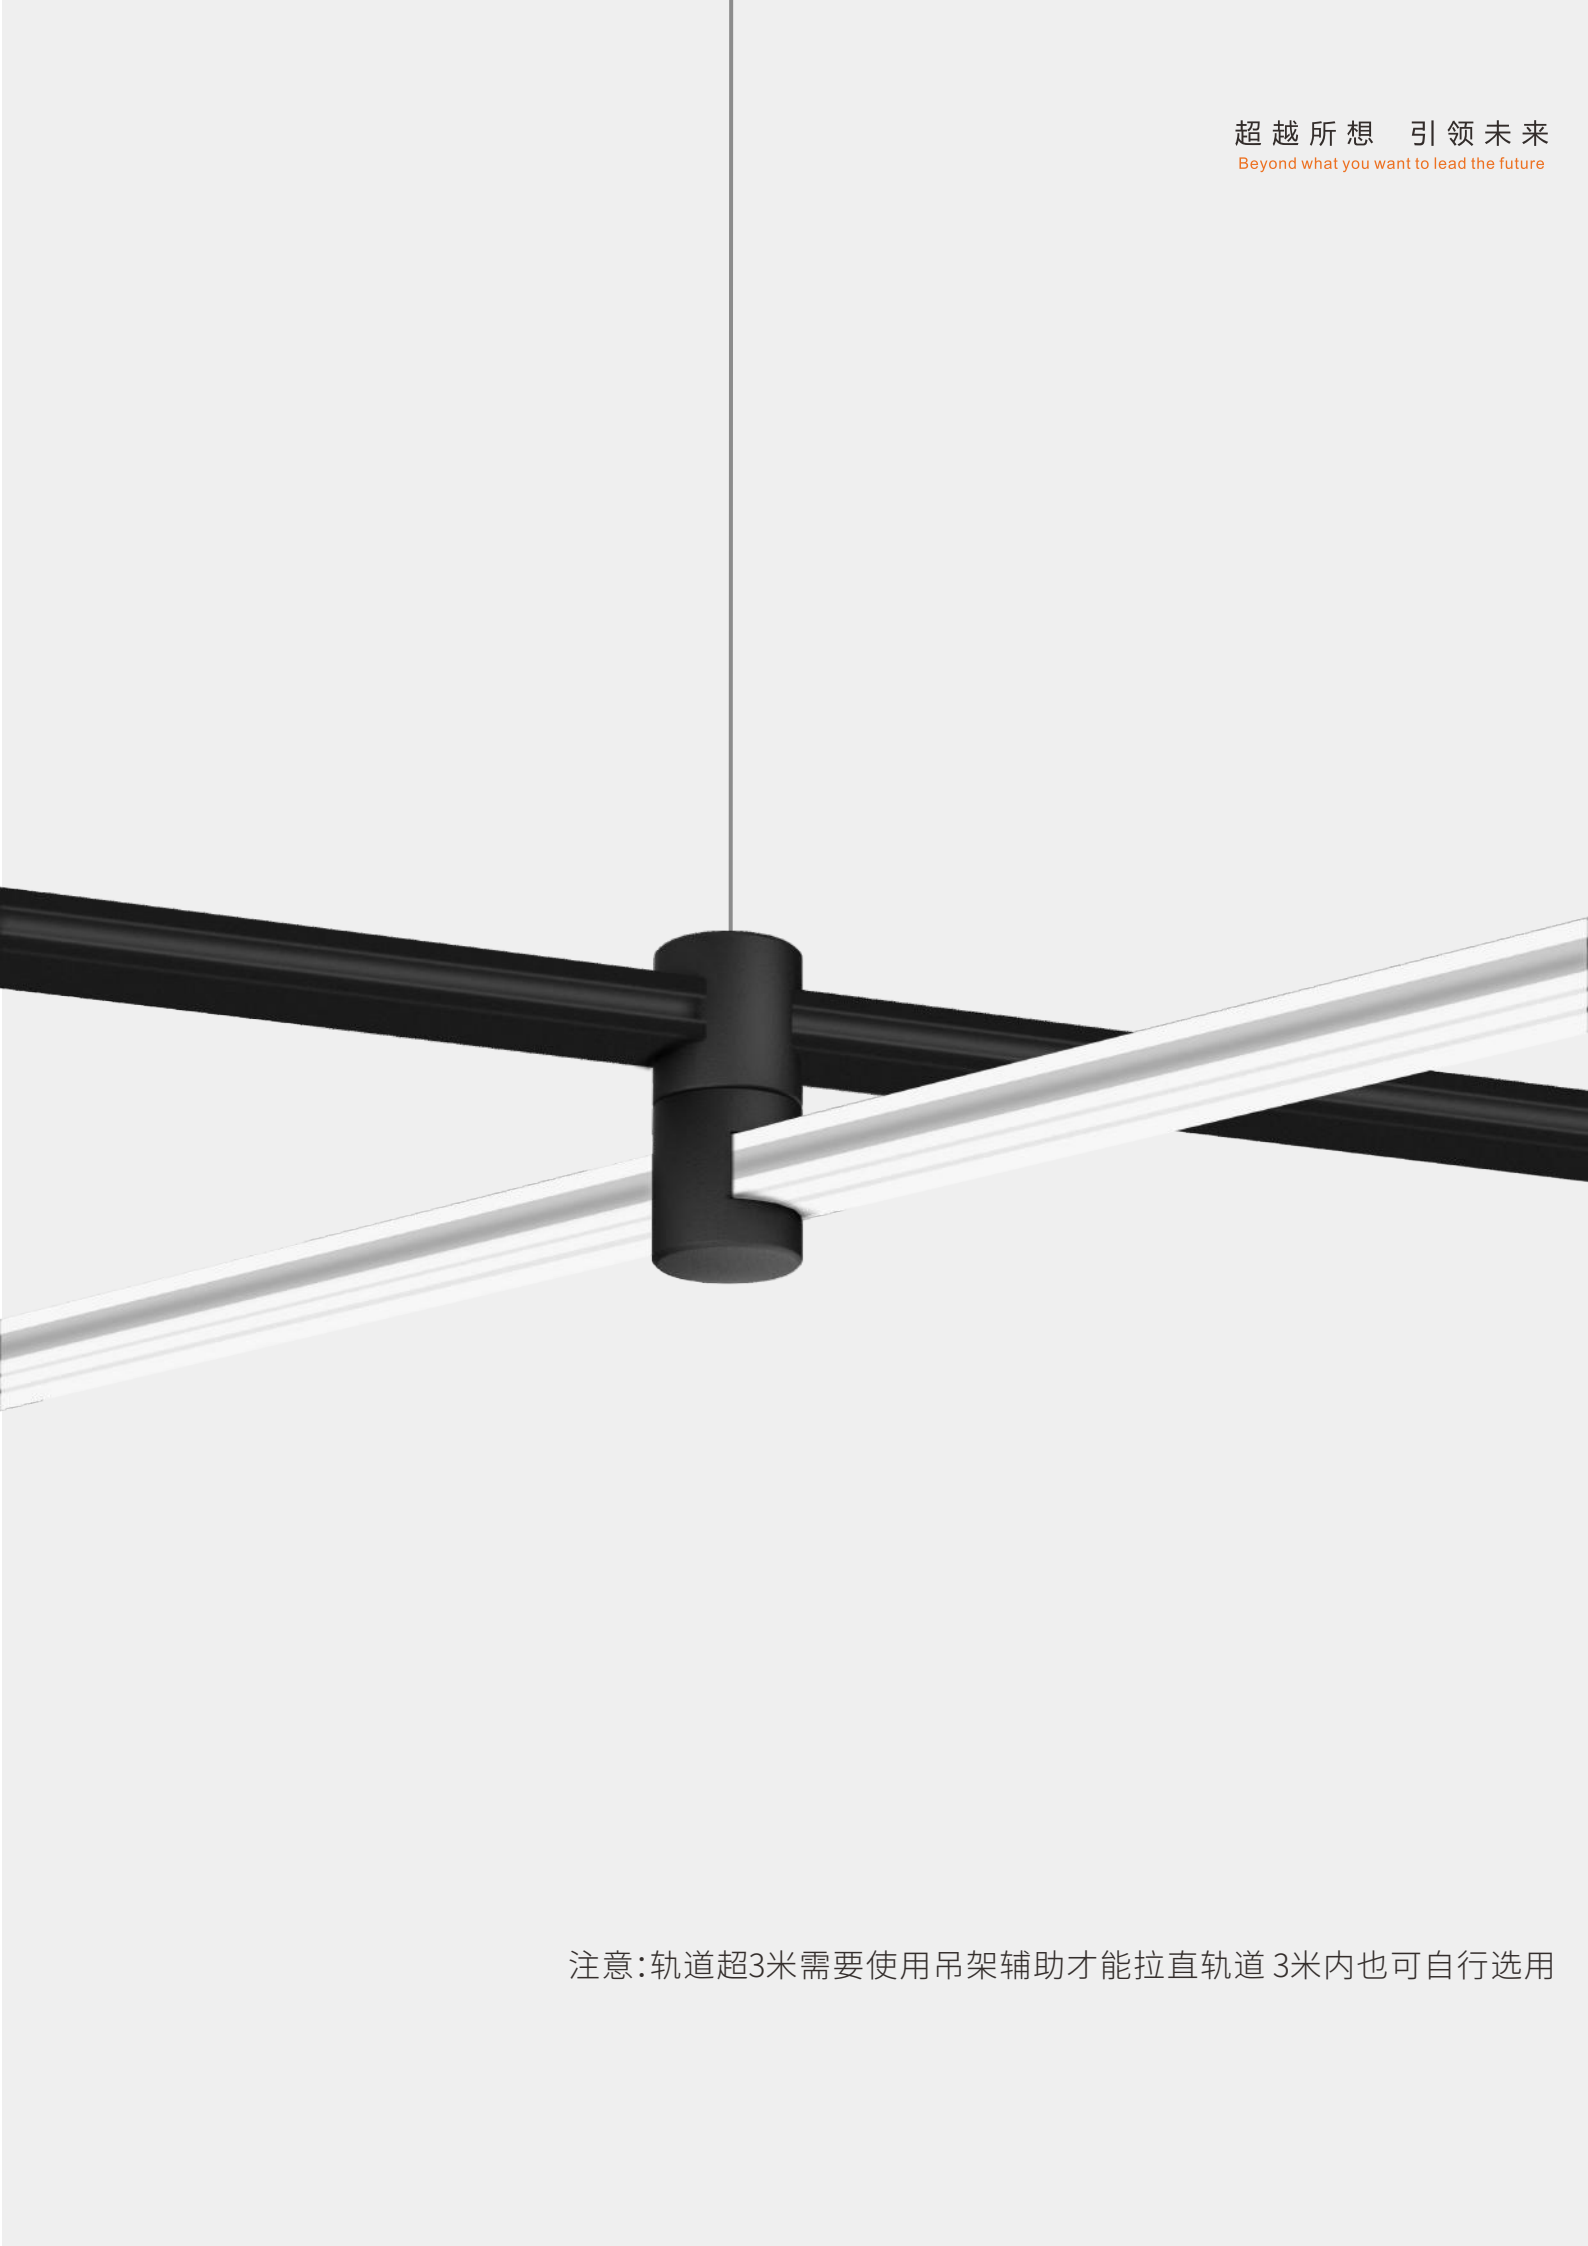

注意:轨道超3米需要使用吊架辅助才能拉直轨道 3米内也可自行选用

实力“两面派”

上面布置灯带,下面可以正常放置灯具






接触面导电插针
皮带锁紧灯具



产品尺寸(mm):

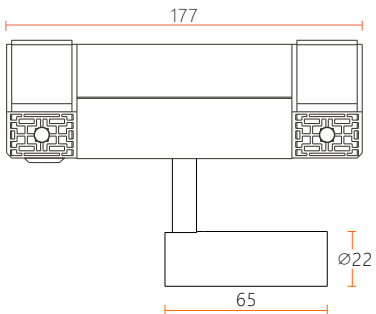

可调光



安装方便



高显指



无频闪



高效节能



名师设计



环保材料

控制系统

- ON/OFF
- 0-10V
- DALI 调光控制系统
- 可控硅控制系统
- 其他调光控制系统

藤蔓系列射灯


光学参数

光束角	15°	24°	38°																																													
光通量	246.3 lm	166.6 lm	268.5 lm																																													
照度距离关系	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>773.66</td><td>0.41</td></tr><tr><td>2.25</td><td>343.85</td><td>0.61</td></tr><tr><td>3.50</td><td>142.10</td><td>0.95</td></tr><tr><td>4.00</td><td>108.80</td><td>1.08</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	773.66	0.41	2.25	343.85	0.61	3.50	142.10	0.95	4.00	108.80	1.08	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>773.66</td><td>0.41</td></tr><tr><td>2.25</td><td>343.85</td><td>0.61</td></tr><tr><td>3.50</td><td>142.10</td><td>0.95</td></tr><tr><td>4.00</td><td>108.80</td><td>1.08</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	773.66	0.41	2.25	343.85	0.61	3.50	142.10	0.95	4.00	108.80	1.08	<table><tr><th>h(m)</th><th>E0°(lx)</th><th>ø(m)</th></tr><tr><td>1.50</td><td>186.43</td><td>1.16</td></tr><tr><td>2.25</td><td>97.30</td><td>1.75</td></tr><tr><td>3.50</td><td>46.08</td><td>2.72</td></tr><tr><td>4.00</td><td>37.62</td><td>3.11</td></tr></table>	h(m)	E0°(lx)	ø(m)	1.50	186.43	1.16	2.25	97.30	1.75	3.50	46.08	2.72	4.00	37.62	3.11
h(m)	E0°(lx)	ø(m)																																														
1.50	773.66	0.41																																														
2.25	343.85	0.61																																														
3.50	142.10	0.95																																														
4.00	108.80	1.08																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	773.66	0.41																																														
2.25	343.85	0.61																																														
3.50	142.10	0.95																																														
4.00	108.80	1.08																																														
h(m)	E0°(lx)	ø(m)																																														
1.50	186.43	1.16																																														
2.25	97.30	1.75																																														
3.50	46.08	2.72																																														
4.00	37.62	3.11																																														
光强分布曲线 (单位:cd)																																																
C0/C180: — C90/C270: —																																																


产品型号:SG-SD2265T/3W
产品尺寸:Ø22*L65mm
材 质:6063铝
外观颜色:宝蓝色/活力橙/酒红色/米白色
防护等级:IP20
调 光:支持
光 源:Osram
电 压:DC24V
功 率:3W
色 温:2700K/3000K/4000K
CRI :≥90
光 束 角:15°/24°/38°

色温对比图例



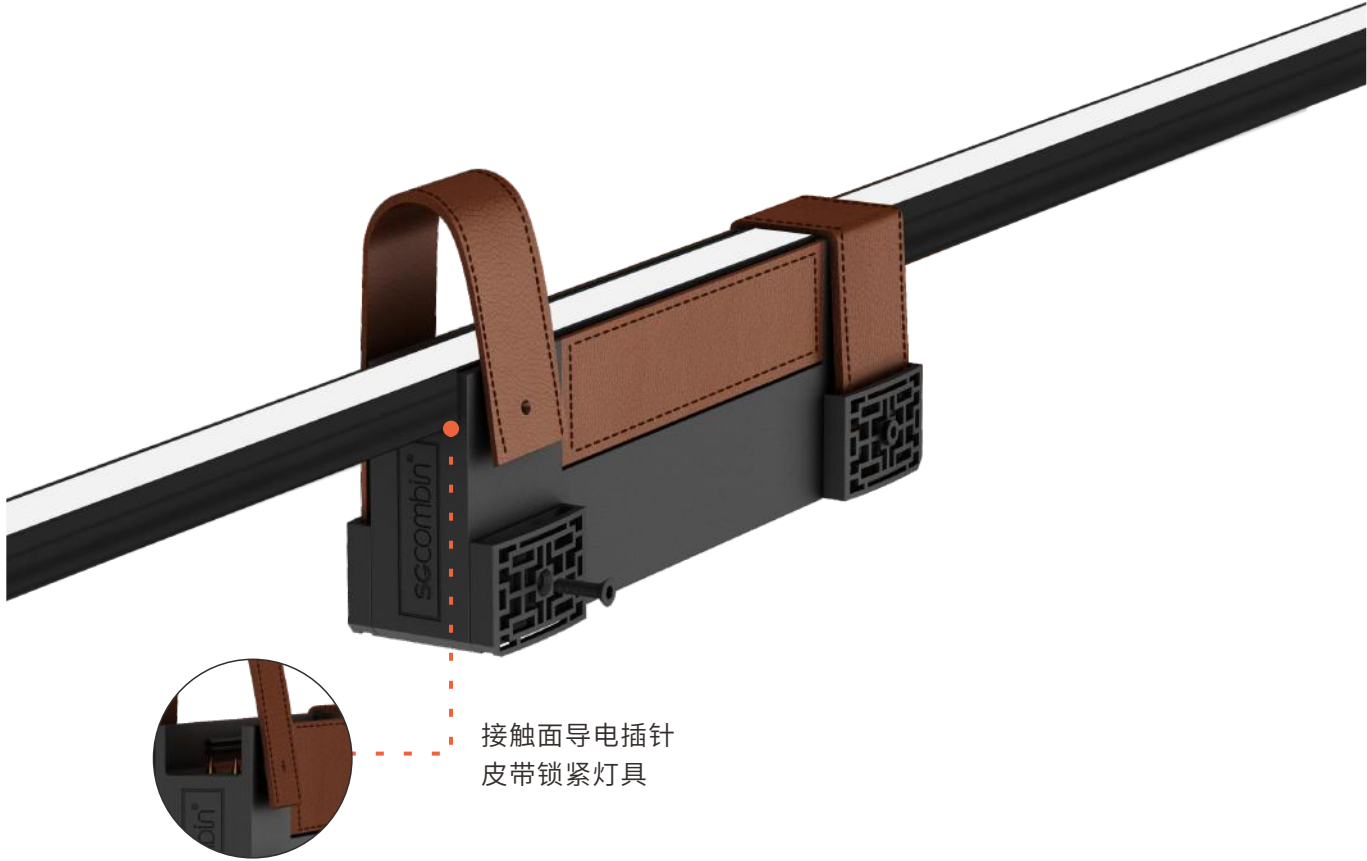

产品尺寸(mm):

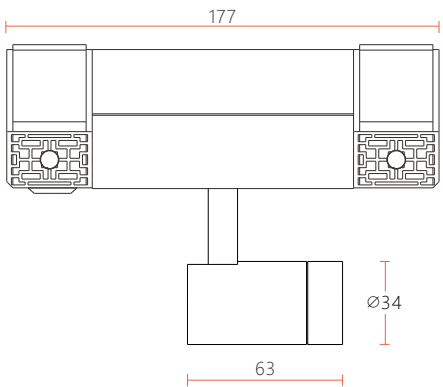

控制系统

- ON/OFF
- 0-10V
- DALI 调光控制系统
- 可控硅控制系统
- 其他调光控制系统

藤蔓系列射灯

光学参数

光束角

15°

24°

38°

光通量

345.3 lm

403.8 lm

258.5 lm

照度距离关系

h(m)	E0°(lx)	ø(m)
1.50	1018.54	0.56
2.25	452.69	0.84
3.50	187.08	1.30
4.00	143.23	1.48

h(m)	E0°(lx)	ø(m)
1.50	740.50	0.57
2.25	329.11	0.86
3.50	136.01	1.33
4.00	104.13	1.52

h(m)	E0°(lx)	ø(m)
1.50	196.43	1.16
2.25	87.30	1.75
3.50	36.08	2.72
4.00	27.62	3.11


光分布曲线

单位:cd

CO/C180:


C90/C270:

产品型号:SG-SD3463T/5W
产品尺寸:Ø34*L63mm
材 质:6063铝
外观颜色:宝蓝色/活力橙/酒红色/米白色
防护等级:IP20
调 光:支持
光 源:Honourtek/Luminus
电 压:DC24V
功 率:5W
色 温:2700K/3000K/4000K
CRI :≥90
光 束 角:15°/24°/38°





产品尺寸(mm):

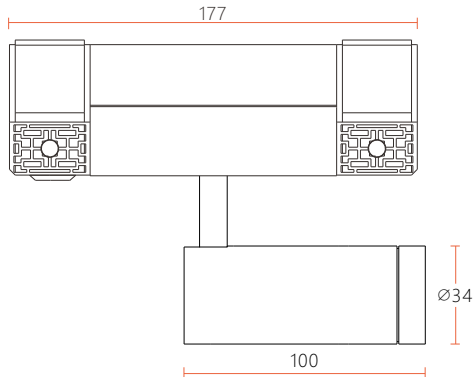

控制系统


- ON/OFF
- 0-10V
- DALI 调光控制系统
- 可控硅控制系统
- 其他调光控制系统

藤蔓系列射灯


光学参数

光束角	15°	24°	38°
光通量	563.5lm	494.4 lm	339.7lm

照度距离关系	h(m)	E0°(lx)	ø(m)	h(m)	E0°(lx)	ø(m)	h(m)	E0°(lx)	ø(m)
	1.50	1327.53	0.57	1.50	968.11	0.61	1.50	259.43	1.12
	2.25	590.01	0.86	2.25	430.27	0.92	2.25	115.3	1.68
	3.50	243.83	1.34	3.50	177.82	1.43	3.50	47.65	2.62
	4.00	186.68	1.53	4.00	136.14	1.63	4.00	36.48	2.99

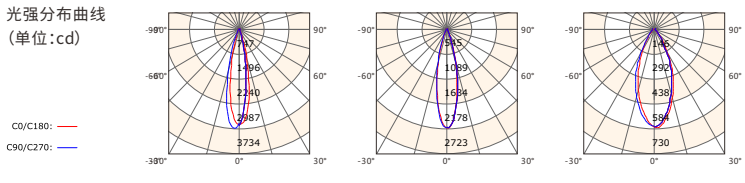

产品型号:SG-SD34100T/8W
产品尺寸:Ø34*L100mm
材 质:6063铝
外观颜色:宝蓝色/活力橙/酒红色/米白色
防护等级:IP20
调 光:支持
光 源:Honourtek/Luminus
电 压:DC24V
功 率:8W
色 温:2700K/3000K/4000K
CRI :≥90
光 束 角:15°/24°/38°





活力橙



宝蓝色




米白色



酒红色

产品尺寸(mm):

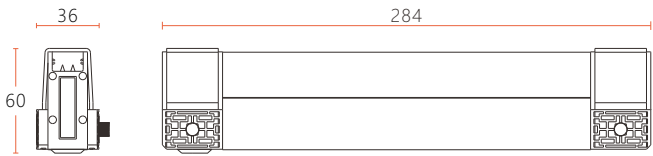

可调光



安装方便



高显指



无频闪



高效节能



名师设计



环保材料

控制系统

- ON/OFF
- 0-10V
- DALI 调光控制系统
- 可控硅控制系统
- 其他调光控制系统

藤蔓系列格栅线性灯

光学参数


光束角 25°

光通量 399.2 lm

照度距离关系

h(m)	E0°(lx)	ø(m)
1.50	733.35	0.55
2.25	325.93	0.82
3.50	134.70	1.28
4.00	103.13	1.47

光强分布曲线
(单位:cd)



C0/C180: —
C90/C270: —



产品型号: SG-GSD3660T/L284/7W

产品尺寸: L284*W36*H60mm

材 质: 6063铝

外观颜色: 宝蓝色/活力橙/酒红色/米白色

防护等级: IP20

调 光: 支持

光 源: Osram

电 压: DC24V

功 率: 7W

色 温: 2700K/3000K/4000K

CRI : ≥90

光 束 角: 25°

色温对比图例




2700K

3000K

4000K



产品尺寸(mm):

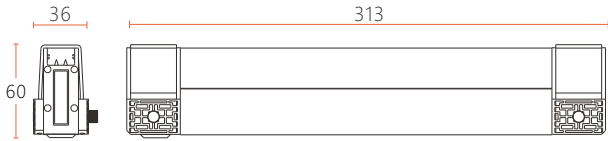

可调光



安装方便



高显指



无频闪



高效节能



名师设计



环保材料

控制系统

- ON/OFF
- 0-10V
- DALI 调光控制系统
- 可控硅控制系统
- 其他调光控制系统

藤蔓系列平面发光线性灯


光学参数

光束角 100°

光通量 167.1 lm

h(m)	E0°(lx)	ø(m)
1.50	30.04	3.64
2.25	13.35	5.46
3.50	5.52	8.50
4.00	4.22	9.72

光强分布曲线
(单位: cd)



C0/C180: —

C90/C270: —



产品型号: SG-PMD3660T/L313/8W

产品尺寸: L313*W36*H60mm

材 质: 6063铝

外观颜色: 宝蓝色/活力橙/酒红色/米白色

防护等级: IP20

调 光: 支持

光 源: Osram

电 压: DC24V


功 率: 8W

色 温: 2700K/3000K/4000K

CRI : ≥90

光 束 角: 100°

色温对比图例




2700K

3000K

4000K


藤蔓系列配件

根据实际情况自行选择自由搭配

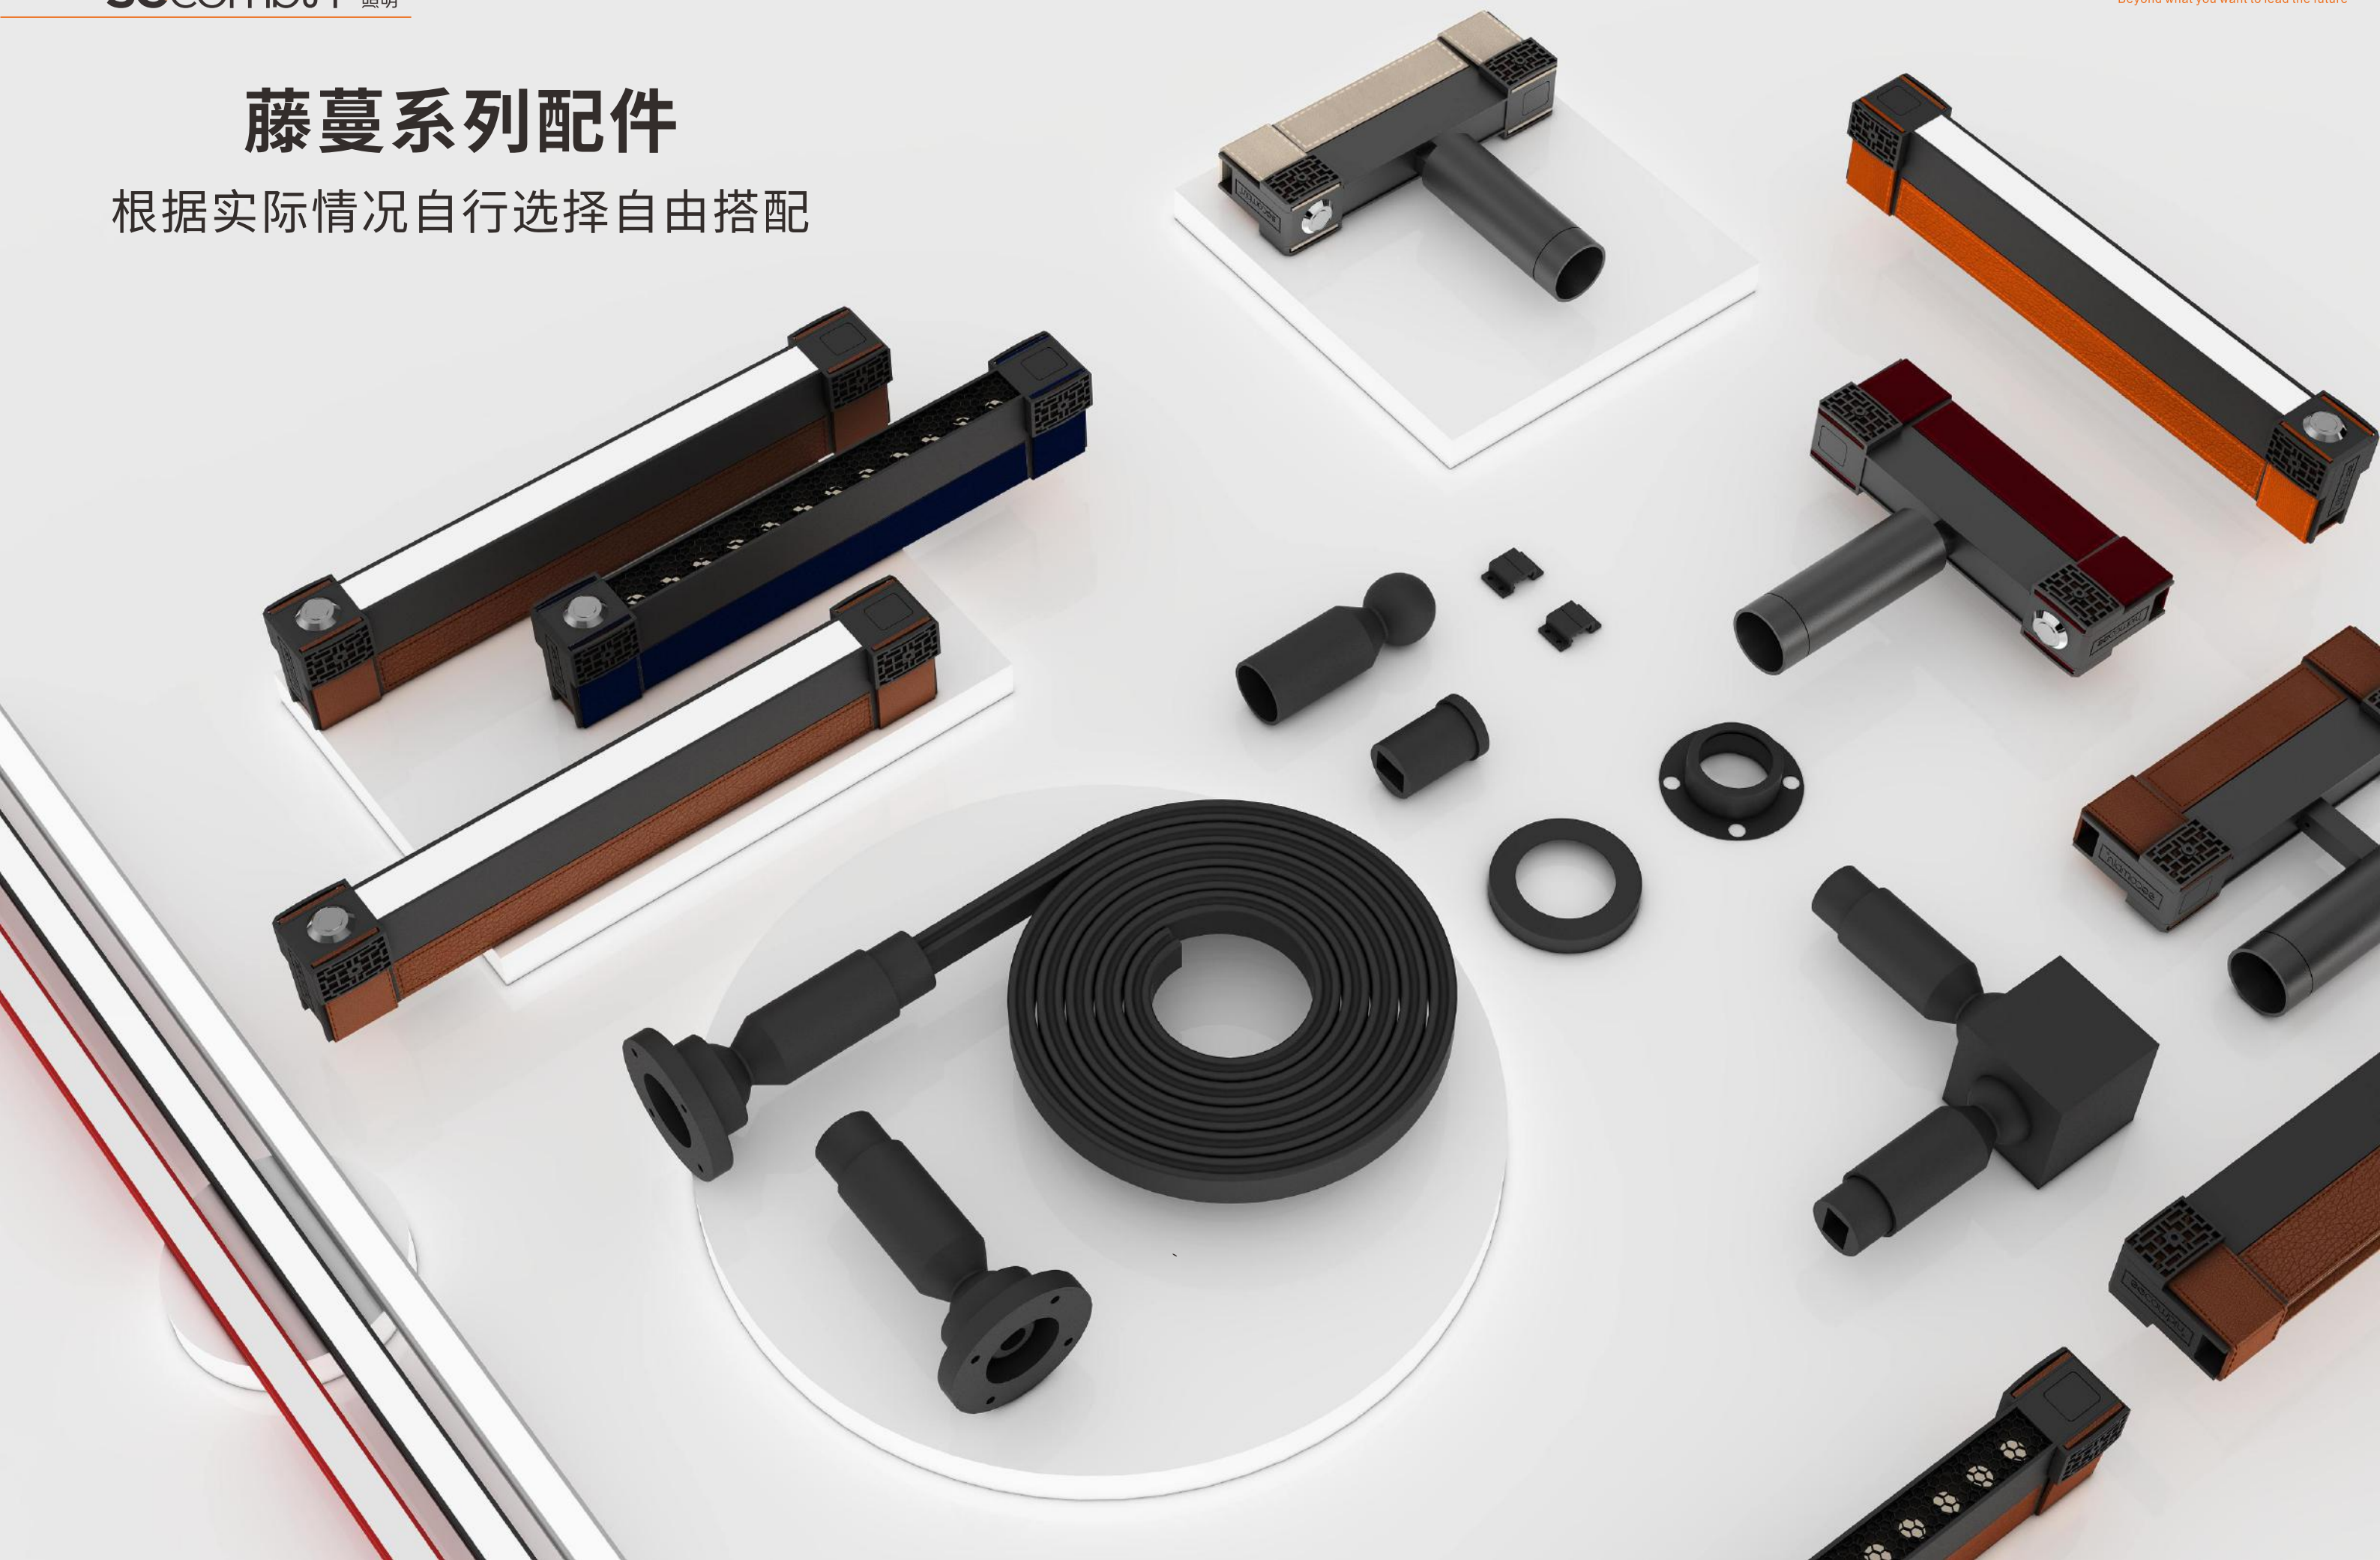


超越所想·超越自由

BEYOND FREEDOM

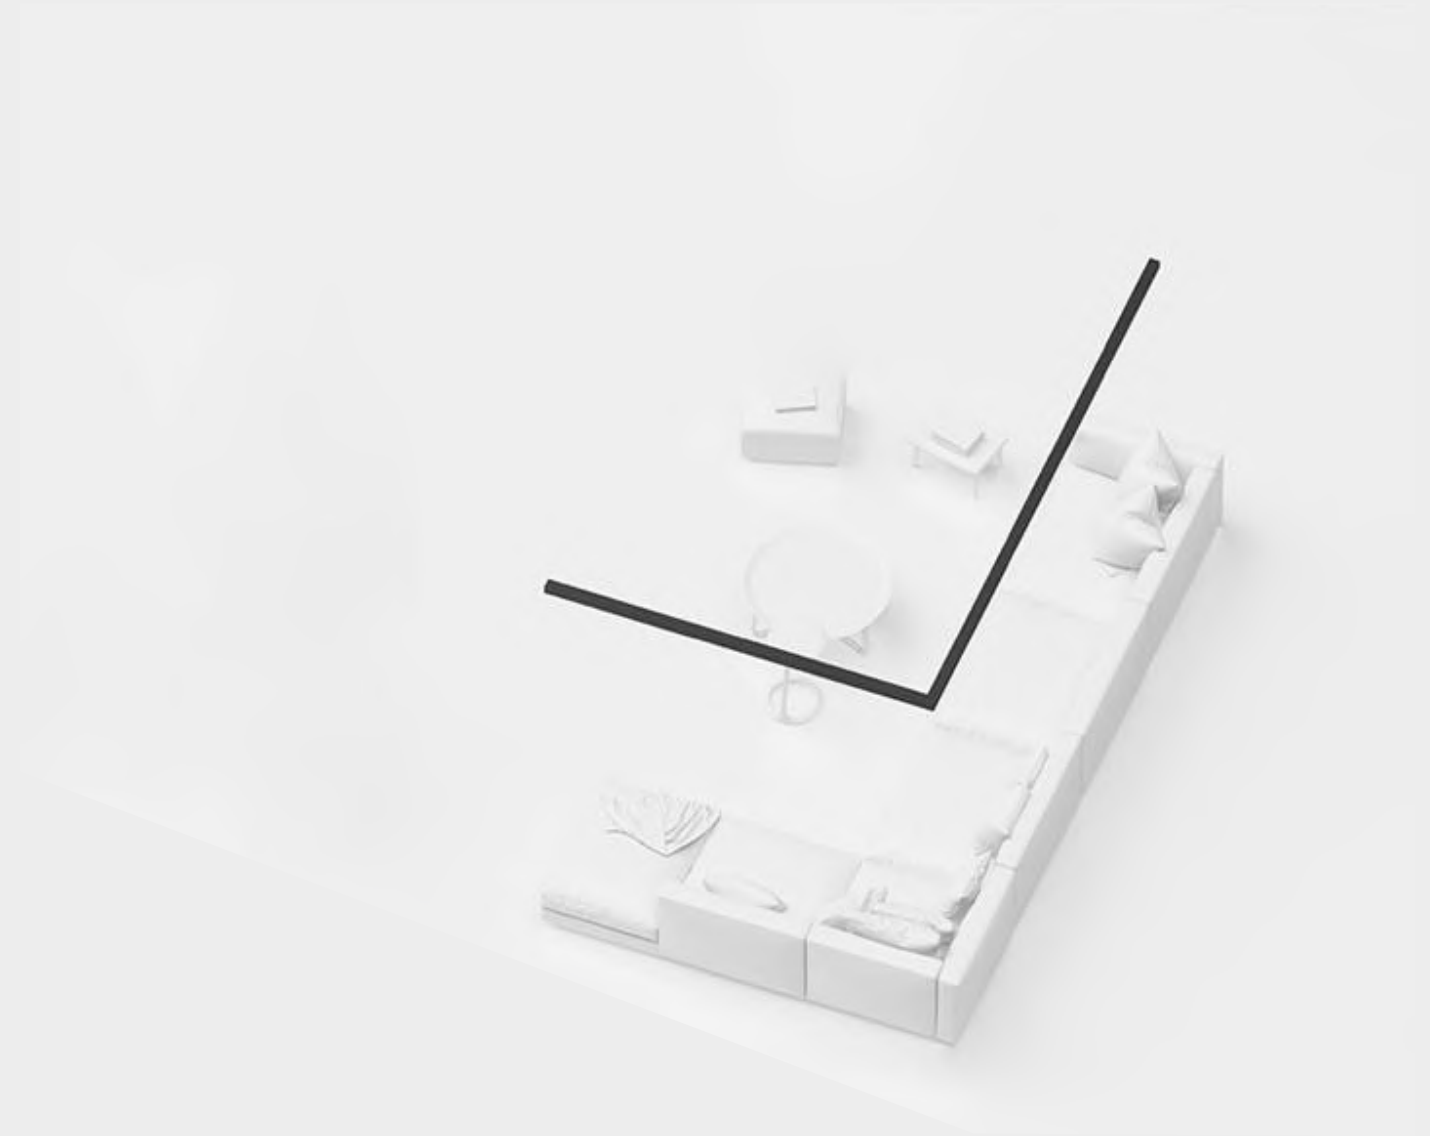

JUST IMAGINE

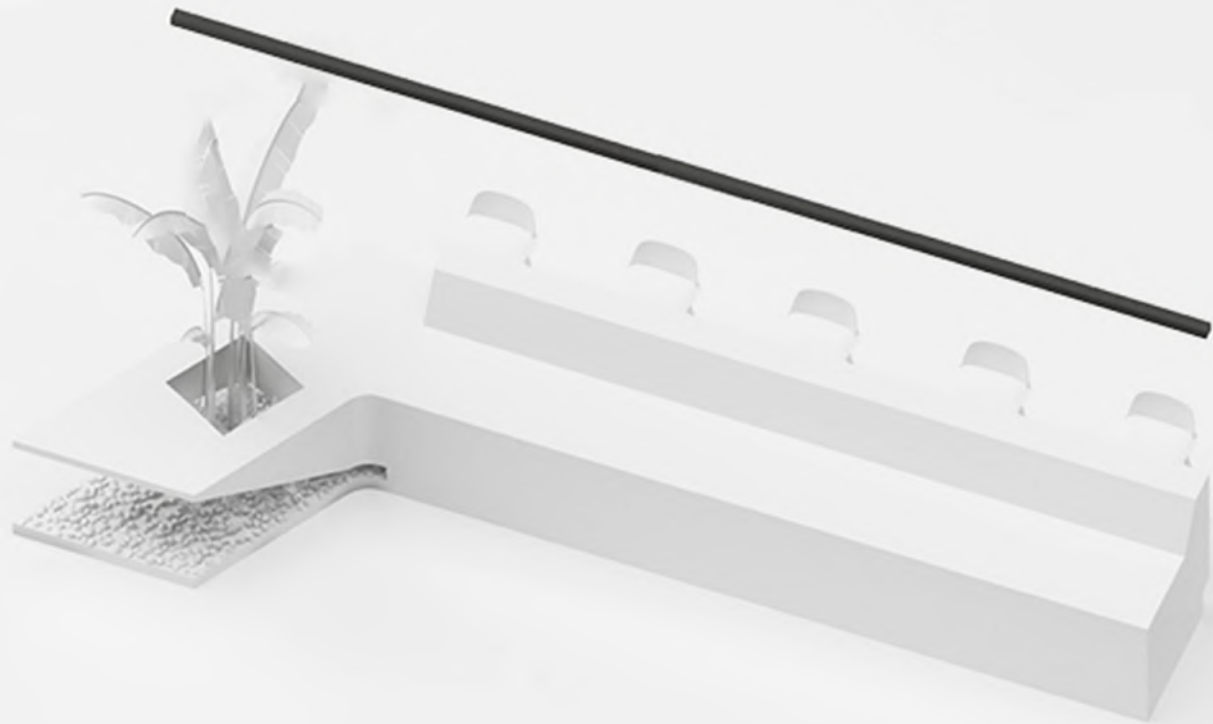





解决层高 实现多样化照明

线条纵横交错间，施展光影魔法
赋予灵动美感



现代简洁线条之美

可以延伸出多种造型
让光影演绎个性的艺术空间



为空间增添艺术感与高级感

灵动而轻盈的流线设计
营造刚柔并济之美



赋予空间个性定义


简单的造型元素，魅力流线感灯光，
呈现简约之美



举步之间 光明立现

设计源于生活的灵感
精而简的灯光设计
打造属于你的照明空间感



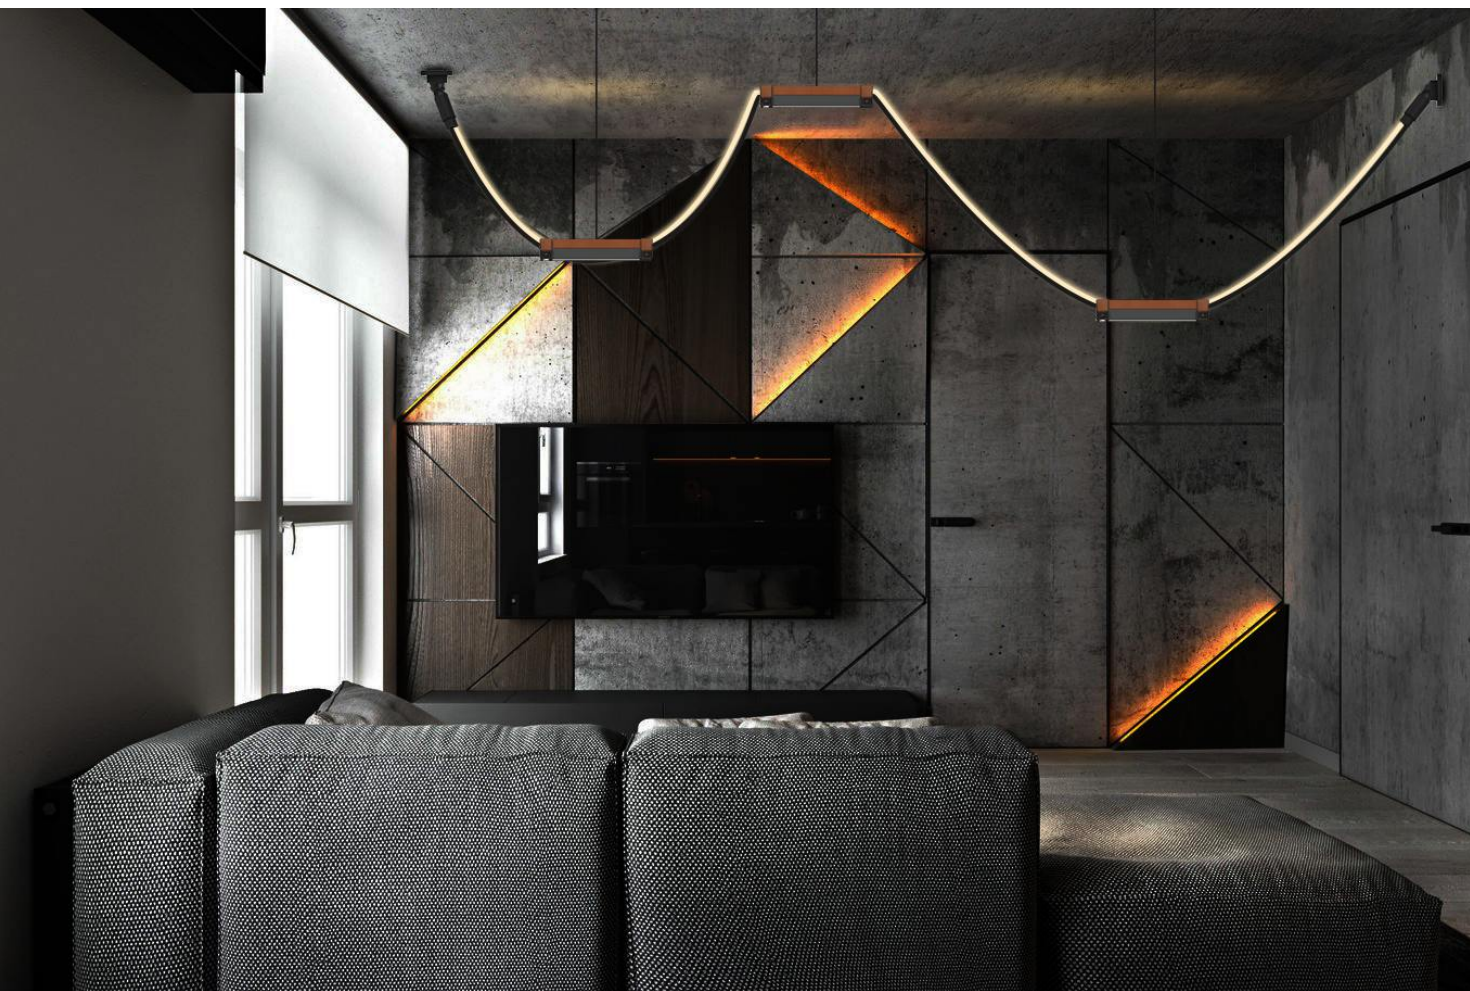

以『不繁』成就『不凡』


简洁的造型，利落的线条遵循“少即是多”的极简设计理念光影配合勾勒出空间的秩序与美感将北欧设计的简约之美展现得淋漓尽致

极简无主灯风格


干净的线条，简约的造型
赋予空间无限变幻与想象




安装说明

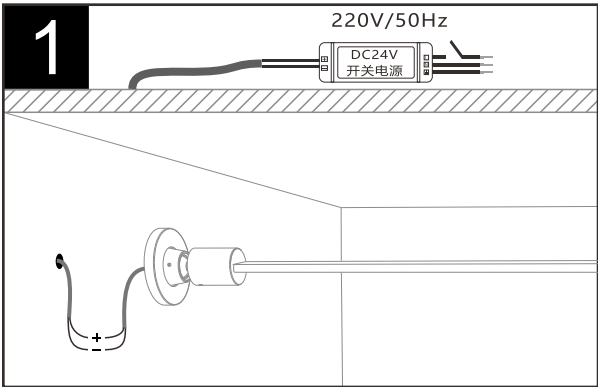


在安装位置预留供电线，将供电线连接灯具，接入DC24V电压，打开电闸，试亮，确保电路畅通。

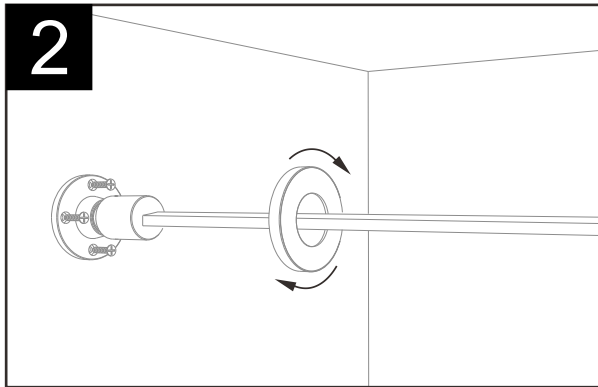

拧开端盖，用配螺丝钉将灯具两端吸顶盘固定好。
注意：固定轨道两端时，尽量拉直轨道。

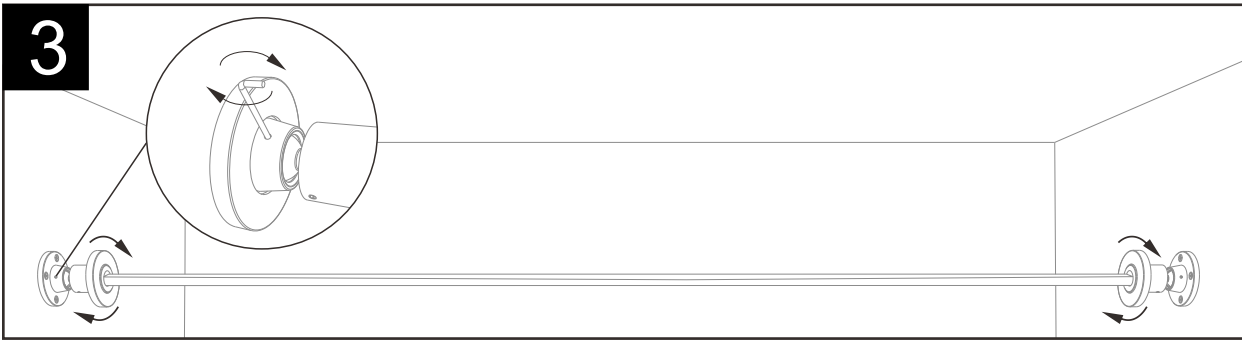

安装好轨道后，将吸顶端盖拧回吸顶盘；用六角匙拧紧吸顶盘上的机米螺丝，将拉力头固定住。（这颗机米用于控制拉力头的调角，安装前发现不能调角可松开机米螺丝）

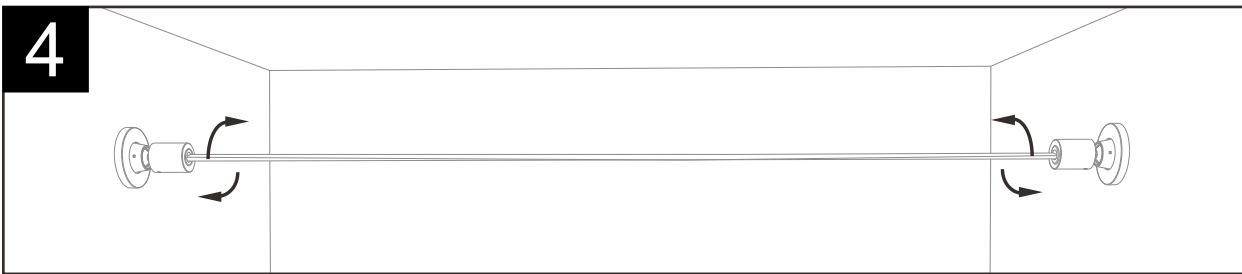

安装好轨道后用拉力头上的旋转件将轨道拉直，旋转时候，要握住轨道，以免轨道同步旋转导致线路扭断（两端能把轨道拉长约40mm）；安装灯具 打开电闸，亮灯试亮。
注意：旋转拉力头时，保证轨道拉直后不要强行再拉，以免把轨道内钢丝拉断。







广东三谷照明科技有限公司

Guangdong Sangu Lighting Technology Co., Ltd

服务热线：0760-88752042

招商热线：13346496970 13425587944

地址：广东省中山市横栏镇茂辉工业区富横西路金盛工业园B栋